



NOTES:

1. SUBSTRATE:
Fused Silica
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO ≤ 3 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1: NONE

S2: NONE

4.  ARROW ON EDGE POINTING TOWARDS SURFACE S1


5.  FINE GRIND SURFACE

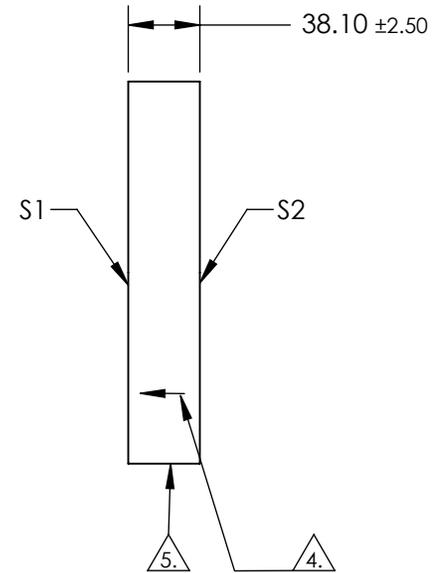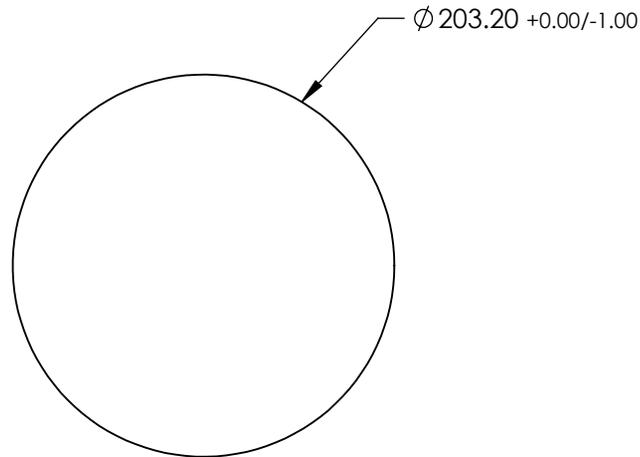

FOR INFORMATION ONLY; DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE ACCURACY AT 632.8nm	$\lambda/10$	N/A
SURFACE QUALITY	60-40	COMMERCIAL POLISH
CLEAR APERTURE	$\text{Ø } 182.90$	$\text{Ø } 182.90$
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE

203.2mm Dia. $\lambda/10$ Fused Silica Optical Flat

DWG NO

31390000

SHEET
1 OF 1