


NOTES:



- 1. SUBSTRATE
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 arcsec
- 3. COATING (APPLY ACROSS COATING APERTURE)
PERFORMANCE SPECIFICATIONS:
T(avg): >80 (AVG)% FROM 350-2200nm
CUT-ON WAVELENGTH: 390nm

4. FINE GRIND SURFACE

- 5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS
APPLY ACROSS CLEAR APERTURE
- 6. ROHS EXEMPT




**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

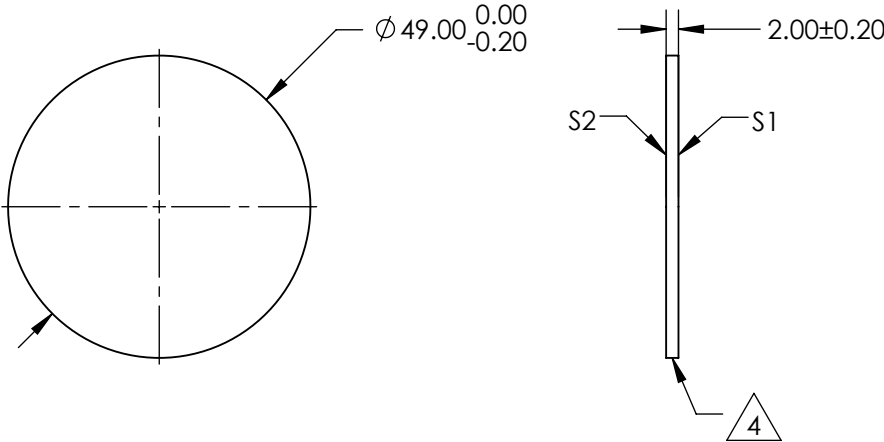

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY



| | | | | | | | | | |
|-----------------|----------------------|----------------------|---|--|-------------|-------------------------|--------|-------|-----------------|
| REV A | S1 | S2 | <div>THIRD ANGLE PROJECTION</div>  | | TITLE | Ø49mm UV CUT-OFF FILTER | | | |
| SHAPE | PLANO | PLANO | | | ALL DIMS IN | mm | DWG NO | 54054 | SHEET 1 OF 1 |
| SURFACE QUALITY | 80-50 | 80-50 | | | | | | | |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | | | | | | | |