

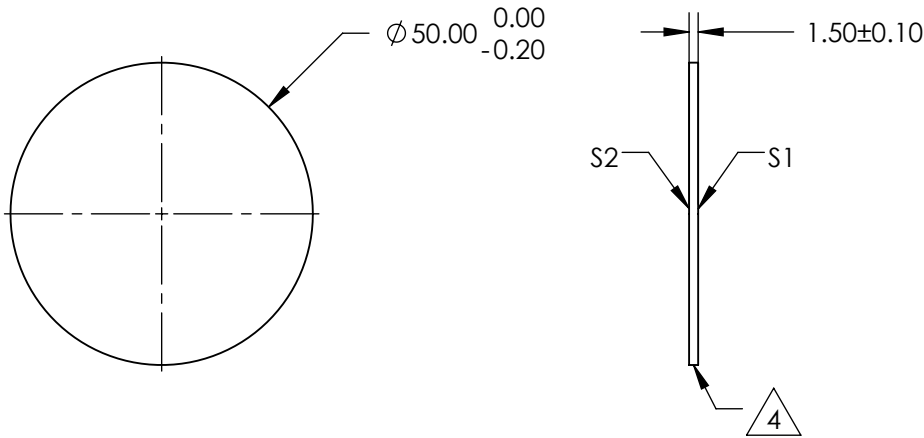


NOTES:

1. SUBSTRATE
2. SURFACE S1 IS TO BE PARALLEL TO SURFACE S2 WITHIN 3 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
WAVELENGTH RANGE: 400 - 700nm
4. FINE GRIND SURFACE
5. POWER IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS
APPLY ACROSS CLEAR APERTURE
6. RoHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®

| REV A | S1 | S2 | THIRD ANGLE PROJECTION | | TITLE | OD 0.04 - 2.0, Ø50mm APODIZING FILTER BULL'S EYE | |
|-----------------|----------------------|----------------------|------------------------|--|--------|--------------------------------------------------|--------------|
| SHAPE | PLANO | PLANO | | | | | |
| SURFACE QUALITY | 60-40 | 60-40 | ALL DIMS IN | | DWG NO | 64390 | SHEET 1 OF 1 |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | mm | | | | |