

PARTS TO THIS DRAWING



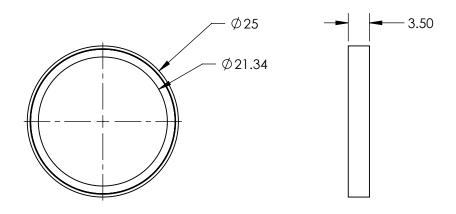



BANDPASS FILTER

REV A	VALUE	
CENTER WAVELENGTH (CWL)	325 ± 2nm	
FULL WIDTH HALF MAX (FWHM)	2.3± 2nm	
MINIMUM TRANSMISSION	≥80 %	
BLOCKING	299 - 320.1 & 329.9 - 357.5	
SURFACE QUALITY	60-40	
COATING TYPE	HARD COATED	
DURABILITY	DURABILITY: MIL-C-48497A SECT. 3.4.1	
ENVIRONMENTAL	ENVIRONMENTAL: MIL-STD-810F SECT. 507.4	

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

				Edmund Optic	S®
	THIRD ANGLE PROJECTION		TITLE	OD6, Ø25mm, 325 nm CWL, 1.2 nm BANDWIDTH, LASER LINE BANDPASS FILTE	R
_	ALL DIMS IN	mm	DWG NO	68957	SHEET 1 OF 1