

PARTS TO THIS DRAWING



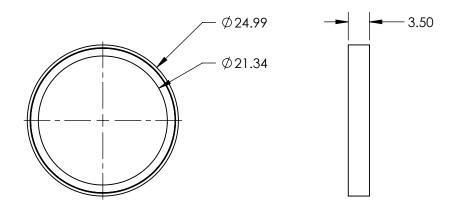

ALL DIMS IN



REV A	VALUE
CENTER WAVELENGTH (CWL)	808 ± 2nm
FULL WIDTH HALF MAX (FWHM)	5.7± 2nm
MINIMUM TRANSMISSION	≥90 %
BLOCKING	743.4 - 795.9 & 820.1 - 888.8
SURFACE QUALITY	60-40
COATING TYPE	HARD COATED
DURABILITY	DURABILITY: MIL-C-48497A SECT. 3.4.1
ENVIRONMENTAL	ENVIRONMENTAL: MIL-STD-810F SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

			Edmund Optics®		
HIRD ANGLE . ROJECTION	$\phi \Box$	TITLE	OD6, Ø25mm, 808 nm CWL, 3.1 nm BANDWIDTH, LASER LINE BANDPASS FILTE	R	
all DIMS IN	mm	DWG NO	68980	SHEET 1 OF 1	