
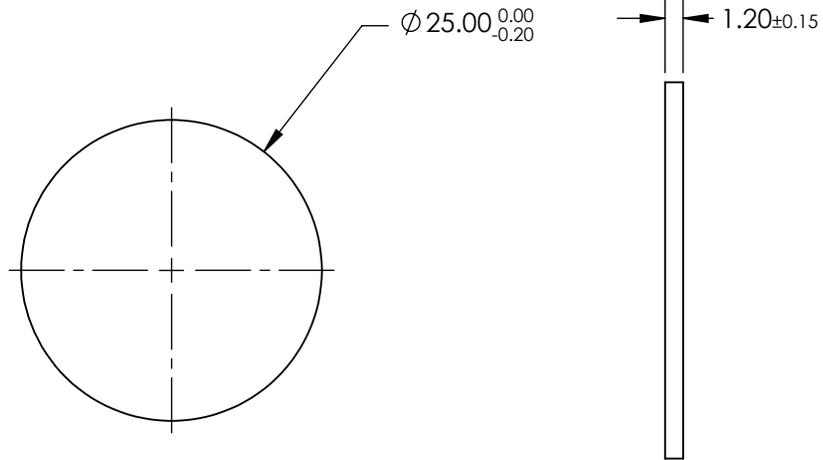


NOTES:

1. SUBSTRATE: BOROFLOAT
2. COATING (APPLY ACROSS COATING APERTURE)
  - S1: Tavg <0.5% @ 350 - 835nm
  - Tavg >85% @ 880 - 1700 nm
  - Tavg >75% @ 1700 - 2500nm
  - S2: NONE
3. ROHS COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

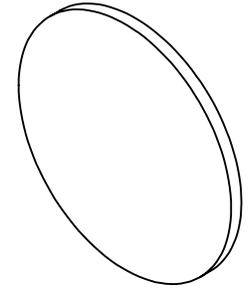

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® **Edmund Optics**®

	S1	S2
SURFACE QUALITY	80-50	80-50

THIRD ANGLE PROJECTION		TITLE	Ø25mm, 850nm, CUT-ON SWIR LONGPASS FILTER	
ALL DIMS IN	mm	DWG NO	86450	SHEET 1 OF 1