




NOTES:

- 1. SUBSTRATE:
N-BK7
- 2. INCIDENT AND REFLECTED BEAMS SHALL BE PARALLEL TO WITHIN 3 ARCSEC
- 3. COATING (APPLY ACROSS COATING APERTURE)
S1: SILVER WITH PROTECTED OVERCOAT (BLACK OVERPAINT)
R(ABS) > 97% FROM 400 - 2500nm @ 0° AOI
R(AVG) > 98% FROM 400 - 2500nm @ 0° AOI
S2: NONE

4. FINE GRIND SURFACE

5. ROHS: COMPLIANT



Note: Protective Overcoat Increases diameter by 30-60µm

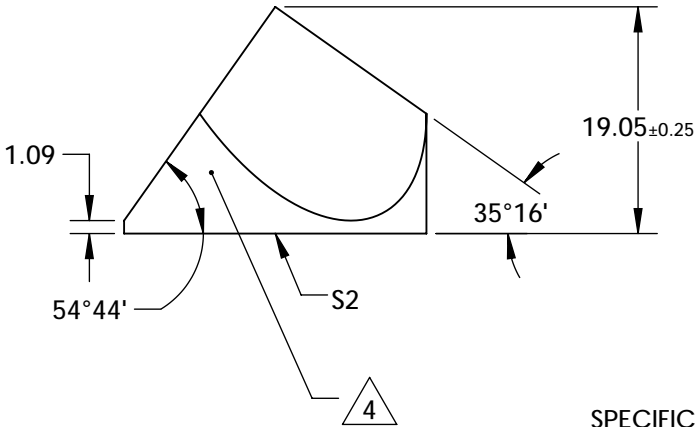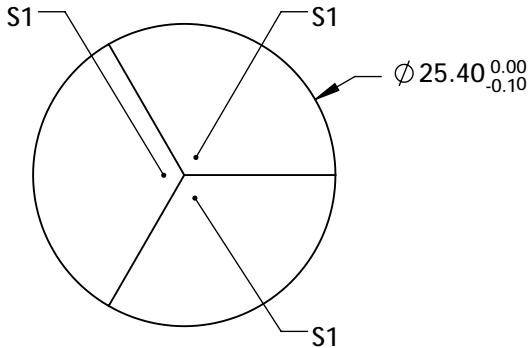

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV A	S1 & S2
SURFACE FLATNESS	$\lambda/8$
SURFACE QUALITY	60-40
WAVELENGTH RANGE	400 - 2200 nm
BEVEL	PROTECTED AS NEEDED

 Edmund Optics®			
THIRD ANGLE PROJECTION 		TITLE	25.4mm SILVER COATED, CORNER CUBE PRISM
ALL DIMS IN	mm	DWG NO	45187
			SHEET 1 OF 1