## NOTES:

1. SUBSTRATE: FUSED SILICA


2. COATING (APPLY ACROSS CLEAR APERTURE)


S1: UNCOATED


S2: UNCOATED



4. Rohs Compliant

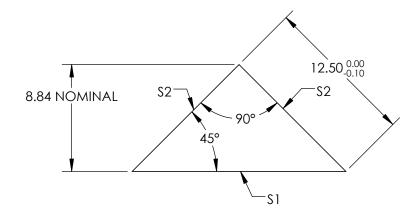





## FOR INFORMATION ONLY: DO NOT MANUFACTURE

**S**2 **PLANO PLANO** SHAPE ±40 ±40 ANGLE TOLERANCE (arcsec) ±1 ±1 PYRAMID TOLERANCE (arcmin) SURFACE QUALITY 20-10 20-10 λ/10 λ/10 SURFACE FLATNESS PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED BEVEL

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

		Edmund Optics®
HIRD ANGLE	TITLE	12.5mm UNCOATED, FUSED SILICA HIGH

1				
THIRD ANGLE TITLE		TITLE	12.5mm UNCOATED, FUSED SILICA HIGH TOLERANCE RA PRISM	
ALL DIMS IN	mm	DWG NO	47202	SHEET 1 OF 1