## NOTES:

1. SUBSTRATE: FLOAT GLASS

2. OPTICAL DENSITY OD: 0.04 - 1.0


FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING





4. BLOCKING WAVELENGTH RANGE: 400 - 700 nm

 POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

6. ROHS COMPLIANT

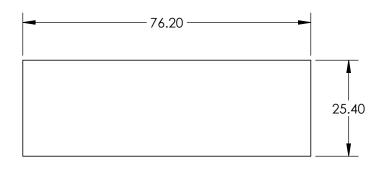





SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

		Edmund	Optics®
--	--	--------	---------

	\$1	\$2		1		OD 0.04 - 1.0 76.2 X 25.4n	Y IZHOHIMITIAOO . mc
SHAPE	PLANO	PLANO	THIRD ANGLE _ PROJECTION	$\bigcirc$	TITLE	VARIABLE ND FILTER	
COATING APERTURE	INCONEL	N/A		<u> </u>		.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	· · · · · · · · · · · · · · · · · · ·
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	64381	SHEET 1 OF 1