## NOTES:


- SUBSTRATE: Float Glass
- 2. COATING (APPLY ACROSS CLEAR APERTURE) \$1: Protected Aluminum (400-700nm) R(AVG) >85% @ 400 - 700nm @ 45°


S2: NONE



SEAMED EDGES

Rohs Compliant

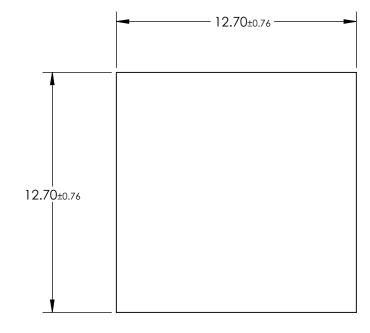

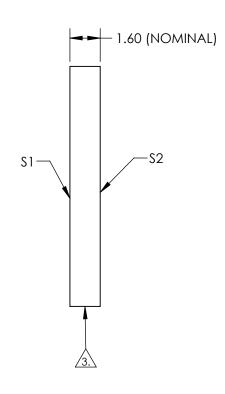

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	\$1 PLANO	\$2 PLANO				<b>Edmund Optic</b>	S®
SURFACE QUALITY	80-50	N/A				12.7 x 12.7mm, 4-6λ Mirror	
SURFACE FLATNESS	4 - 6λ	N/A	THIRD ANGLE PROJECTION		TITLE	12.7 X 12.711111, 4 0X WIIIO	
CLEAR APERTURE	Ø11.43 x 11.43	N/A		1			CUEET
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69244	SHEET 1 OF 1