NOTES:


1. SUBSTRATE : N-BK7


2. COATING (APPLY ACROSS CLEAR APERTURE) \$1: UNCOATED

> S2: LASER V-COAT R(abs) <0.25% @ 633nm

3. FINE GRIND SURFACE

4. ROHS COMPLIANT



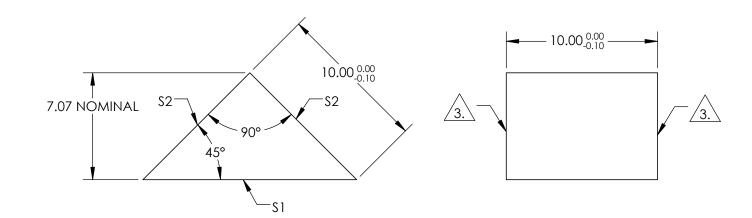

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

R

						Edmund Optic	C ®
REV. A	S1	S2					رى د
ANGLE TOLERANCE (arcsec)	±15	±15			TITLE	10mm, 633 V-COAT, N-BK7 LASER LINE RA PRISM	
SURFACE QUALITY	40-20	40-20					
SURFACE FLATNESS	λ/8	λ/8					CUEFT
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	83213	Sheet 1 Of 1