## NOTES:

- 1. SUBSTRATE: POLYMER FILM XP42-75
- 2. OPERATING TEMPERATURE: -40 TO +80 °C


FOR INFORMATION ONL


PARTS TO THIS DRAWING


DO

MANUFACTURE

- 3. WAVELENGTH RANGE: 400 700 nm
- 4. POLARIZATION: >99
- 5. TRANSMISSION (%): Single: 42 Parallel: 36 Crossed: <0.004
- 6. ROHS COMPLIANT

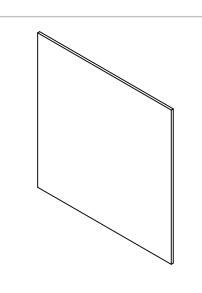

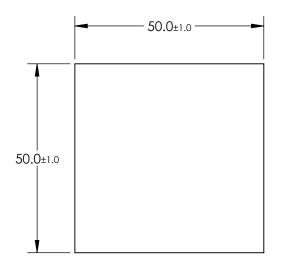

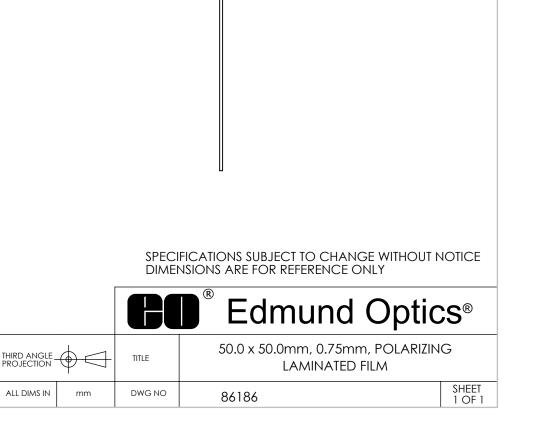

 $-0.765 \pm 0.08$