NOTES:

1. SUBSTRATE: FUSED SILICA

2. COATING (APPLY ACROSS CLEAR APERTURE)

\$1: NONE S2: NONE


3. EDGES: FINE GROUND

4. CENTERING: <3-5 ARCMIN

5. ASPHERE FIGURE ERROR: 0.75µm µm RMS

ASPHERIC SURFACE DESCRIBED BY (REF. COEFFICIENT TABLE)

$$Z_{ASPH}(Y) = \frac{(\sqrt[]{RADIUS})^*Y^2}{1 + \sqrt{1 - (1 + k)^*(\sqrt[]{RADIUS})^2 *Y^2}} + D*Y^2 + E*Y^4 + F*Y^6 + G*Y^8 + H*Y^{10} + J*Y^{12} + L*Y^{14}$$

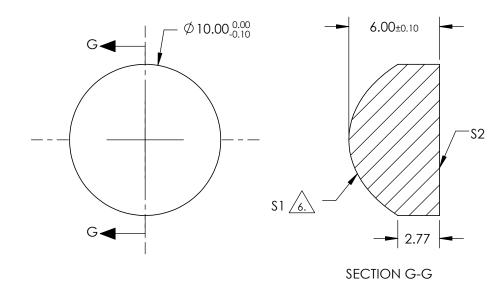

## COEFFIECIENT TABLE 7 COEFFIECIENT **S**1 k -0.632906 0.00012823215 1.5211816e-006 F G 3.3940061e-008 Н 0 J 0 0

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	\$1	\$2	EFL @ 587.6nm	10	P	<b>Edmund Optics</b> ®
SHAPE	CONVEX	PLANO	BFL @ 587.6nm	5.89	W	Lumuna Optics
RADIUS	4.585	INFINITY	THIRD ANGLE PROJECTION		TITLE	10mm DIA 0.50 NA UNCOATED, UV FUSED SILICA ASPHERIC LENS
SURFACE QUALITY	60-40	60-40				
CLEAR APERTURE	90%	90%				
BEVEL MAX	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	87974 SHEET 1 OF 1