

NOTES:

1. SUBSTRATE FUSED SILICA
2. WAVELENGTH RANGE: 340-850nm




3. FINE GRIND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. TRANSMISSION >92%

6. ROHS COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

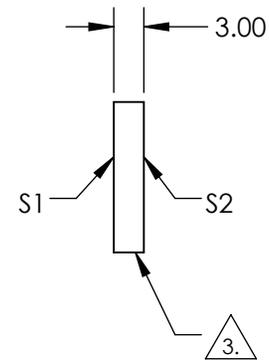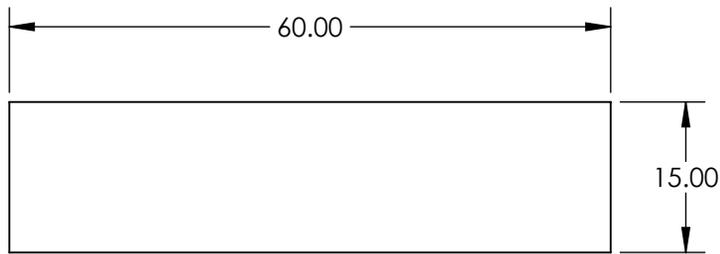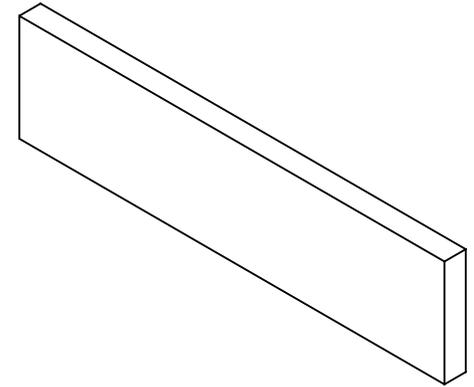

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® **Edmund Optics**®

	S1	S2	THIRD ANGLE PROJECTION		TITLE	LINEAR VARIABLE LONGPASS FILTER	
SHAPE	PLANO	PLANO			DWG NO	88363	SHEET
COATING APERTURE	VARIABLE	VARIABLE	ALL DIMS IN	mm			
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED					