
NOTES:

- 1. SUBSTRATE: EXCIMER GRADE UV FUSED SILICA
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO 5 arcsec
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1 & \$2: R(ABS) < 0.25% @ 355nm, AOI: 0°

4. FINE GRIND SURFACE

5. RoHS COMPLIANT

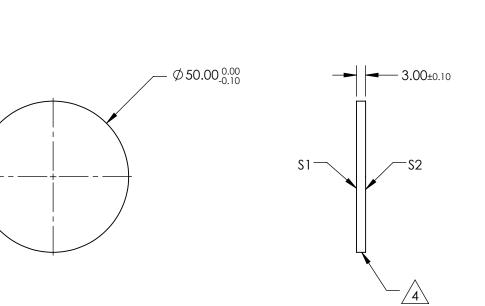

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

- .

|                   | S1                   | \$2                  | ]           |    |        | Edmund Optic  | CS <sup>®</sup> ∣ |
|-------------------|----------------------|----------------------|-------------|----|--------|---|-------------------|
| SHAPE             | PLANO                | PLANO                |             |    | TITLE  | 50mm DIA. 355nm LASER V-COAT, λ/20 FUSED<br>SILICA WINDOW |                   |
| SURFACE QUALITY   | 10 - 5               | 10 - 5               |             |    |        |   |                   |
| DESIGN WAVELENGTH | 355nm                | 355nm                | '           |    |        | SHEET   |                   |
| BEVEL             | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | ALL DIMS IN | mm | DWG NO | 65867   | 1 OF 1            |

