



1. SUBSTRATE: Float Glass
2. COATING (APPLY ACROSS CLEAR APERTURE)
S1: Protected Silver (450-1000nm)
R(AVG) >98% @ 450 - 800nm
R(AVG) >98.5% @ 2000 - 10,000nm

3. EDGES GROUND



A diagram of a circle with a diameter dimension line and label. The dimension line is a horizontal line with arrows at both ends pointing to the circle's edge. The label is $\phi 5.00 \pm 0.25$.

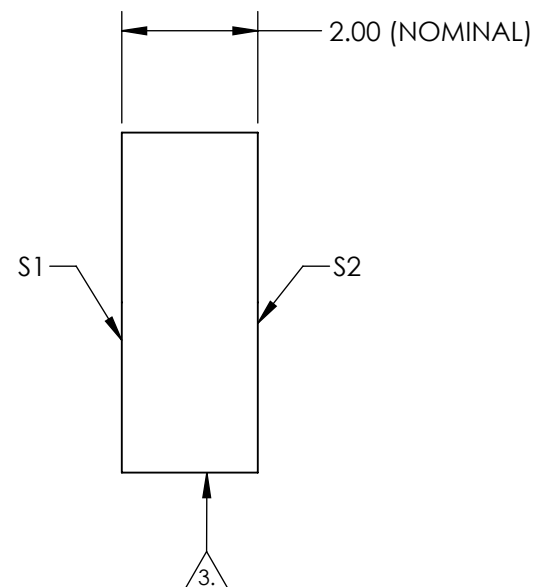

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	N/A
SURFACE FLATNESS	4 - 6λ	N/A
CLEAR APERTURE	Ø 4.00	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



ALL DIMS IN mm

 Edmund Optics®

TITLE

5mm Dia Silver, 4-6 λ Mirror

DWG NO

89463

SHEET
1 OF 1