## NOTES:

1. SUBSTRATE MATERIAL: N-SF11

2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2: MgF2

R(avg) ≤1.75% @ 400 - 700nm



- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. Rohs Compliant



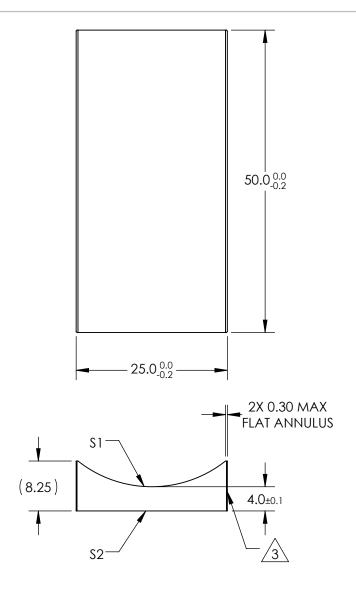

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2					
SHAPE	CONVEX	PLANO	EFL	-25		Edmund Ontice	<b>¬</b> ®
RADIUS	-19.6	∞	BFL	-27.2		Edmund Optics	<b>&gt;</b> ਁ
SURFACE QUALITY	60-40	60-40				25mm H X 50mm L X -25mm FL MgF2	
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00	THIRD ANGLE PROJECTION		TITLE	COATED, CYLINDER LENS	
COATING APERTURE	24.00 X 49.00	24.00 X 49.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO		SHEET 1 OF 1