


NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)



S1 & S2: VIS 0°

R(avg) ≤0.4% @ 425 - 675nm
3. FINE GROUND SURFACE
4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

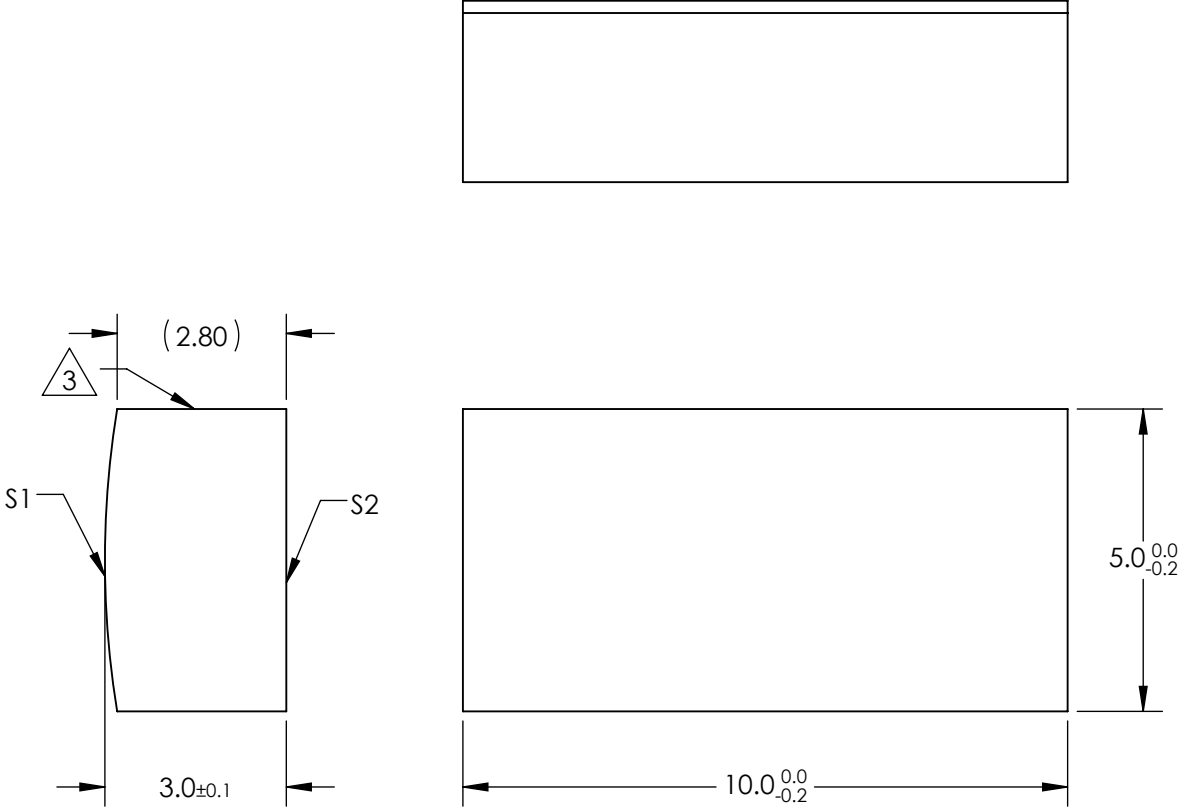

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®					
SHAPE	CONVEX	PLANO						
RADIUS	15.5	∞	EFL	30	BFL	28.02		
SURFACE QUALITY	60-40	60-40						
CLEAR APERTURE	4.00 X 9.00	4.00 X 9.00	THIRD ANGLE PROJECTION		TITLE		5mm H X 10mm L X 30mm FL VIS 0° COATED, CYLINDER LENS	
COATING APERTURE	4.00 X 9.00	4.00 X 9.00						
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69694	SHEET 1 OF 1	