
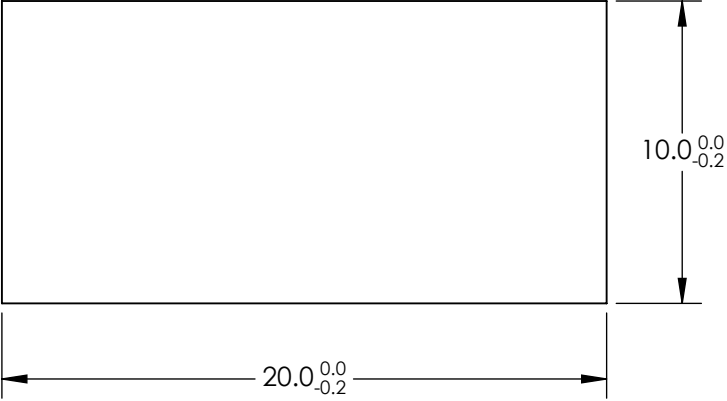



NOTES:

- 1. SUBSTRATE MATERIAL:
N-BK7
- 2. COATING (APPLY ACROSS CLEAR APERTURE)



S1 & S2: VIS 0°

R(avg) ≤0.4% @ 425 - 675nm
- 3. FINE GROUND SURFACE
- 4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. RoHS COMPLIANT

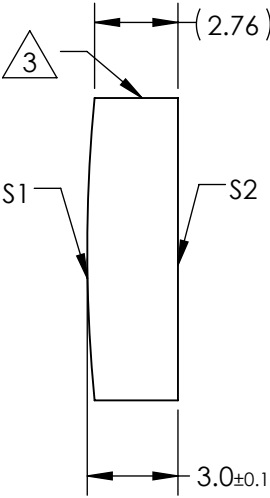

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®						
SHAPE	CONVEX	PLANO							
RADIUS	51.63	∞	EFL	100	BFL	97.92			
SURFACE QUALITY	60-40	60-40				TITLE	10mm H X 20mm X L 100mm FL VIS 0° COATED, CYLINDER LENS		
CLEAR APERTURE	9.00 X 19.00	9.00 X 19.00							
COATING APERTURE	9.00 X 19.00	9.00 X 19.00	ALL DIMS IN			mm	DWG NO	69701	SHEET 1 OF 1
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED							