


NOTES:

1. SUBSTRATE MATERIAL:  
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)  
  
S1 & S2: VIS 0°  
  
R(avg) ≤0.4% @ 425 - 675nm



3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY  
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

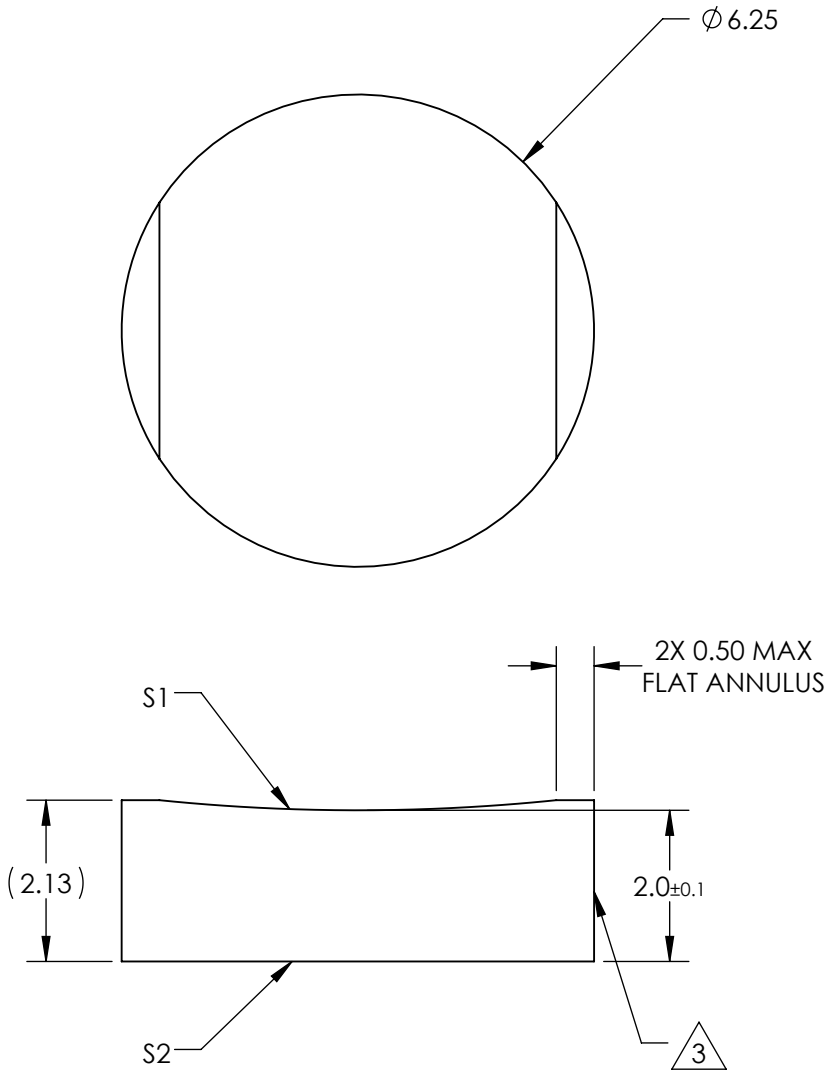

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

|                  |                     |                     |  |    |        |   |                 |        |
|------------------|---------------------|---------------------|--|----|--------|---|-----------------|--------|
| REV. A           | S1                  | S2                  | <div> Edmund Optics®</div>        |    |        |   |                 |        |
| SHAPE            | CONVEX              | PLANO               |  |    |        |   | EFL             | -50    |
| RADIUS           | -25.84              | ∞                   |  |    |        |   | BFL             | -51.32 |
| SURFACE QUALITY  | 60-40               | 60-40               | <div>THIRD ANGLE PROJECTION</div> |    | TITLE  | 6.25mm DIA X -50mm FL VIS 0° COATED,<br>CYLINDER LENS |                 |        |
| CLEAR APERTURE   | Ø5.25               | Ø5.25               |  |    |        |   |                 |        |
| COATING APERTURE | Ø5.25               | Ø5.25               |  |    |        |   |                 |        |
| BEVEL            | PROTECTED AS NEEDED | PROTECTED AS NEEDED | ALL DIMS IN  | mm | DWG NO | 69793   | SHEET<br>1 OF 1 |        |