
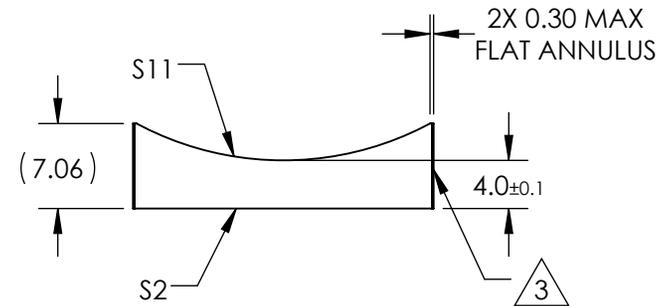


NOTES:

1. SUBSTRATE MATERIAL:  
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)  
  
S1 & S2: NIR I  
  
R(avg) ≤0.5% @ 600 - 1050nm


3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

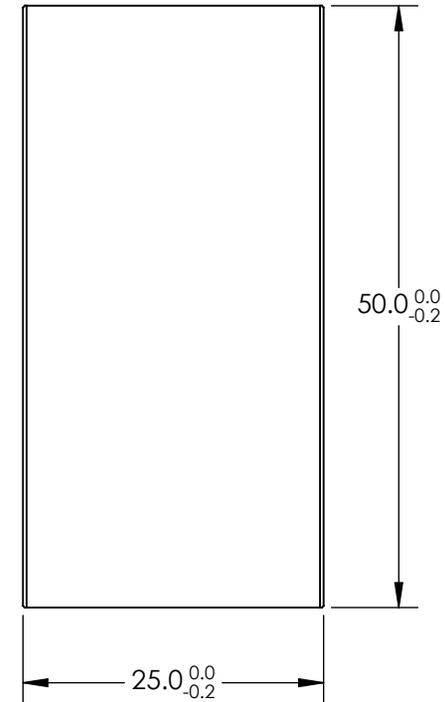

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	-50	 <b>Edmund Optics®</b>	
SHAPE	CONVEX	PLANO	BFL	-52.6		
RADIUS	25.84	∞	THIRD ANGLE PROJECTION 		TITLE	25mm H X 50mm L X -50mm FL NIR I COATED, CYLINDER LENS
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	69827
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00	SHEET 1 OF 1			
COATING APERTURE	24.00 X 49.00	24.00 X 49.00				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				