




NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)
- S1 & S2: VIS-NIR
- $R(\text{abs}) \leq 0.25\% @ 880\text{nm}$
 $R(\text{avg}) \leq 1.25\% @ 400 - 870\text{nm}$
 $R(\text{avg}) \leq 1.25\% @ 890 - 1000\text{nm}$
3. FINE GROUND SURFACE
4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

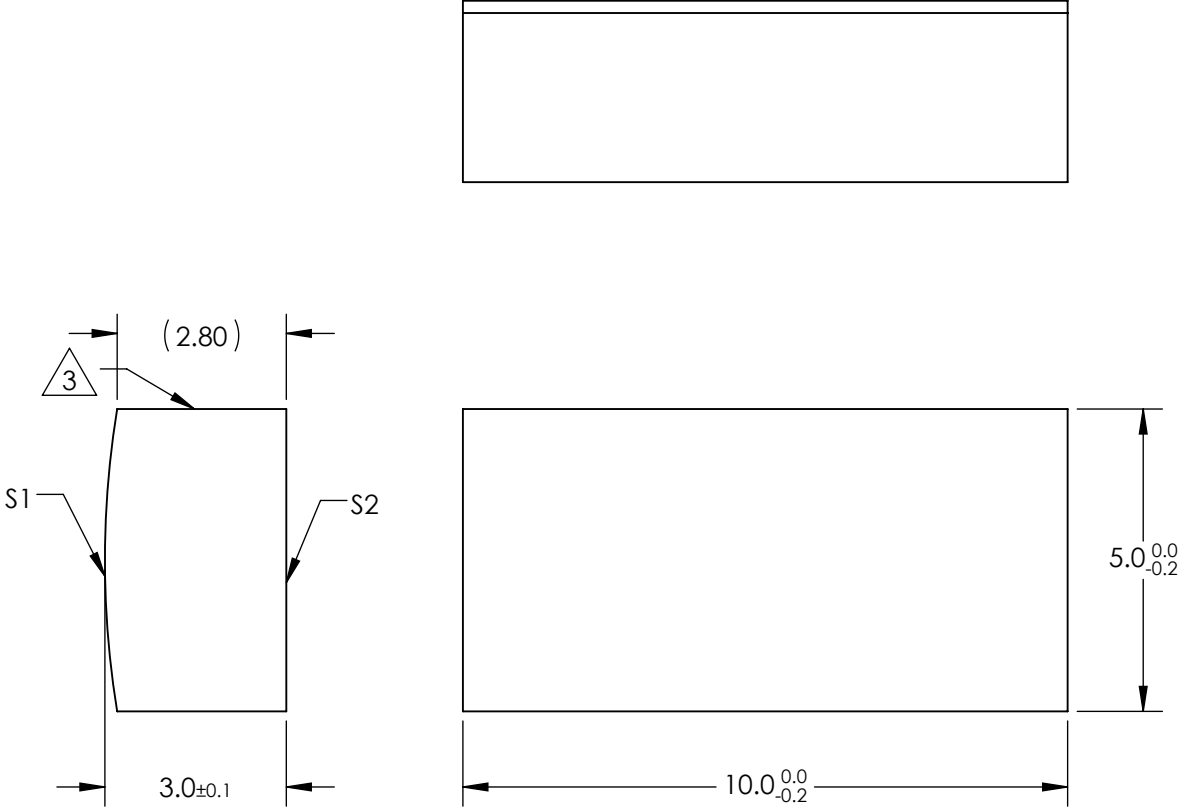

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®				
SHAPE	CONVEX	PLANO					
RADIUS	15.5	∞	EFL	30	BFL	28.02	
SURFACE QUALITY	60-40	60-40			TITLE	5mm H X 10mm L X 30mm FL VIS-NIR COATED, CYLINDER LENS	
CLEAR APERTURE	4.00 X 9.00	4.00 X 9.00					
COATING APERTURE	4.00 X 9.00	4.00 X 9.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	47959	SHEET 1 OF 1