## NOTES:


- 1. SUBSTRATE MATERIAL: ALUMINUM
- 2. FINISH (EXCEPT SURFACE S1): BLACK ANODIZED


3. COATING (APPLY ACROSS CLEAR APERTURE)
S1: PROTECTED GOLD
R(AVG) >94% @ 0.7-0.8µm
R(AVG) >97% @ 0.8-2.0µm
R(AVG) >98% @ 2-12µm


SURFACE ROUGHNESS: <100 Å RMS

- 4. FOCAL LENGTH TOLERANCE: ±1%
- 5. ROHS COMPLIANT



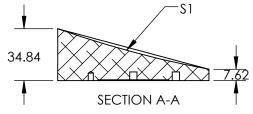

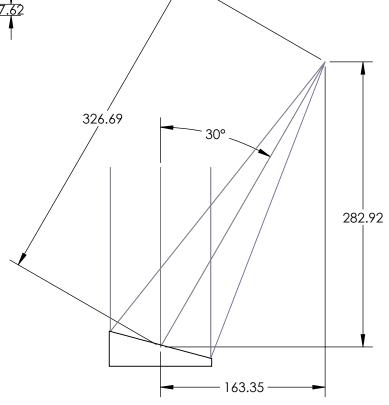

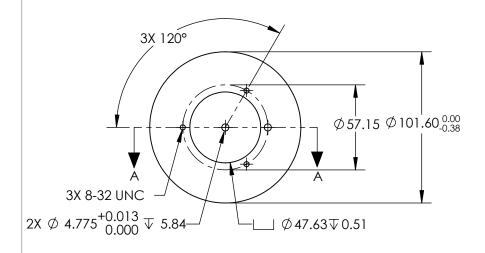

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	\$1	EFL	326.69		Edmund Ontice	
SHAPE	PARABOLIC	PFL	304.80		Edmund Optics	<b>&gt;</b> ຶ
REFLECTIVE WAVEFRONT DISTORTION AT 632.8nm (RMS)	2λ	THIRD ANGLE PROJECTION		TITLE	Ø101.6 X 326.69mm EFL 30° OAP PROTECTED	
SURFACE FIGURE AT 632.8nm (RMS)	1λ				GOLD MIRROR 100Å	
CLEAR APERTURE	90%		1			CLIEFT
BEVEL	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	35585	SHEET 1 OF 1