

## NOTES:

- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 13° 00' NOMINAL BLAZE WAVELENGTH: 500nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



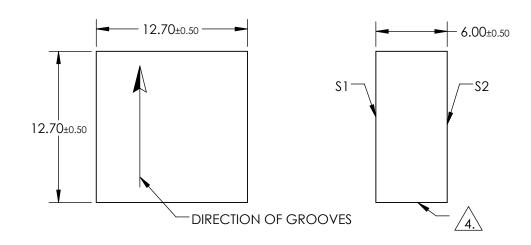

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

	\$1	\$2		
SHAPE	PLANO	PLANO		
CLEAR APERTURE	11.43 x 11.43	11.43 x 11.43		

**Edmund Optics**®

THIRD ANGLE PROJECTION	$\Diamond$	TITLE	GRATING DIFF 900GR 500nm 12./ x 1	2./
ALL DIMS IN	mm	DWG NO	64399	SHEET 1 OF 1