

## NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLY ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. WAVELENGTH RANGE: 400-700nm ABSOLUTE DIFFRACTION EFFICIENCY: 45-65% GROOVE DENSITY: 2400 grooves/mm



5. Rohs Compliant



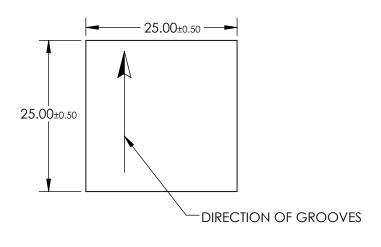



## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

 S1
 S2

 SHAPE
 PLANO
 PLANO

 CLEAR APERTURE
 22.5 x 22.5
 N/A

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

<b>Edmund Optics</b>
----------------------

THIRD ANGLE PROJECTION		TITLE	GRATING HOLO 2400GR VIS 25 X 25	
ALL DIMS IN	mm	DWG NO	43225	SHEET 1 OF 1