

NOTES:

1. SUBSTRATE:
N-BK7
2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN 1 ARCMIN
3. COATING (APPLY ACROSS COATING APERTURE)
S1: NONE
S2: NONE

4. EDGES: FINE GROUND

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE



6. TRANSMITTED WAVE FRONT OVER THE CLEAR APERTURE SHALL BE
SPHERICAL (Y^4) $+0.25\lambda$ WAVE PEAK TO VALLEY @ 587nm.
WAVE FRONT ERROR FROM IDEAL SPHERICAL FORM SHALL BE
LESS THEN ± 0.0625 WAVES

7. ASPHERIC SURFACE DESCRIBED BY (REF. COEFFICIENT TABLE):

$$Z(Y) = \frac{(1/\text{RADIUS}) * Y^2}{1 + \sqrt{1 - (1+k) * (1/\text{RADIUS})^2 * Y^2}} + D * Y^2 + E * Y^4 + F * Y^6 + G * Y^8 + H * Y^{10} + J * Y^{12} + L * Y^{14}$$

8. APPLY AN ARROW POINTING TOWARDS THE ASPHEREIC SURFACE S2 WITH
PENCIL OR PERMANENT INK

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

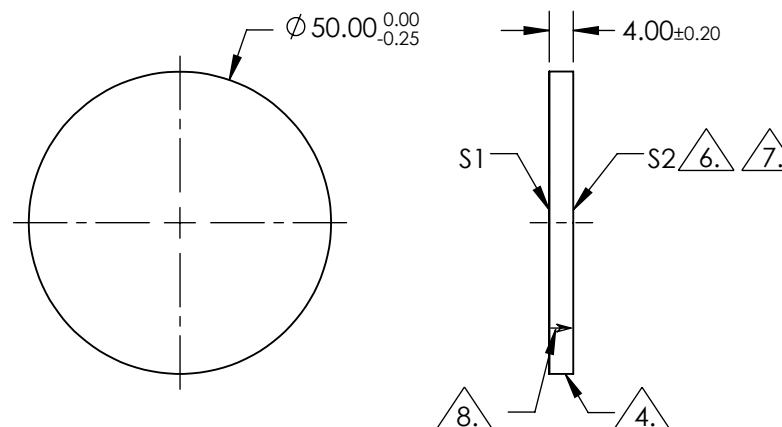

COEFFICIENT TABLE 7.

COEFFICIENT	S1	S2
k	0	0
D	0	0
E	0	-1.109024E-09
G	0	0
H	0	0
J	0	0
L	0	0

	S1	S2
SHAPE	PLANO	PLANO
CLEAR APERTURE	>85	>85
SURFACE QUALITY	60-40	60-40
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®



THIRD ANGLE
PROJECTION

TITLE

50mm DIA +0.25λ ABERRATION, SPHERICAL
ABERRATION PLATE

ALL DIMS IN

mm

DWG NO

66761

SHEET
1 OF 1