
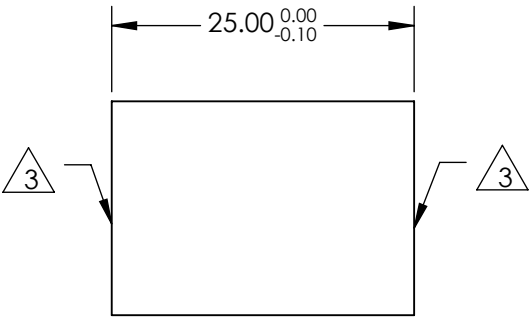


NOTES:

- 1. SUBSTRATE: FUSED SILICA
- 2. COATING (APPLY ACROSS CLEAR APERTURE)
 - S1: NONE
 - S2: 532nm Laser AR Coating
 - R(ABS) < 0.25% @ 532nm @ 0° AOI
- DAMAGE THRESHOLD
 - PULSED: 10J/cm² @ 20ns, 20Hz @ 532nm

3 FINE GRIND SURFACE

- 4. ROHS COMPLIANT

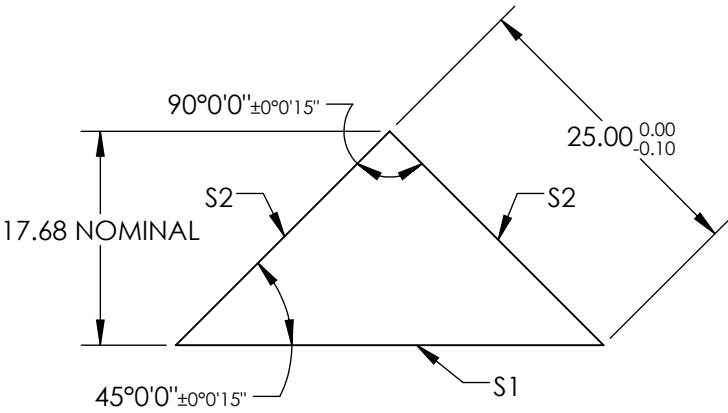

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	31.81 x 22.50	Ø22.50
SURFACE FLATNESS	λ/20	λ/20
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION

ALL DIMS INmm

Edmund Optics®

TITLE

25mm 1/20 WV 532nm AR CTD HT RA FS PRISM

DWG NO

37633

SHEET

1 OF 1