
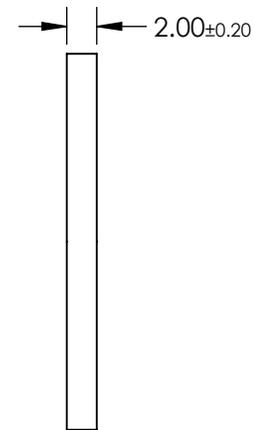
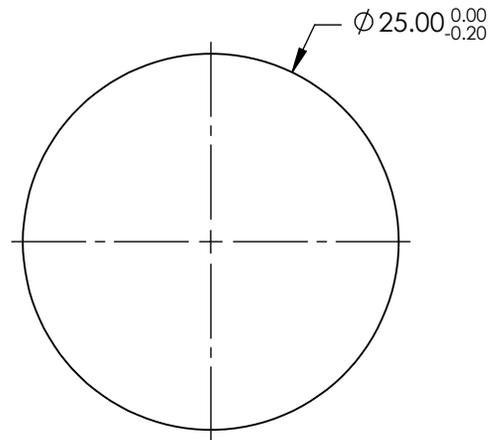


NOTES:

1. SUBSTRATE: B270
2. COATING (APPLY ACROSS COATING APERTURE)  
S1 &S2: AR COATED
3. CONSTRUCTION: DICHROIC
4. THE POLARIZER CONSISTS OF A POLYMER POLARIZATION FILM CEMENTED BETWEEN TWO PIECES OF OPTICAL GLASS
5. ROHS: COMPLIANT



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

REV. A	VALUE
WAVELENGTH RANGE (nm)	750 - 850
EXTINCTION RATIO	>1000:1
TRANSMISSION	30%

THIRD ANGLE PROJECTION		TITLE	Ø25mm 750-850nm, NIR LINEAR POLARIZER
ALL DIMS IN	mm	DWG NO	48892
			SHEET 1 OF 1