
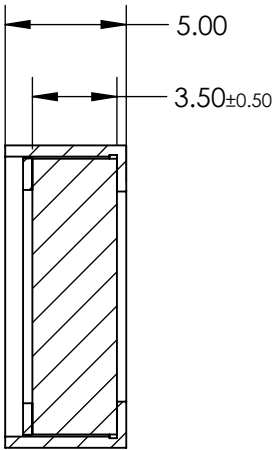


**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

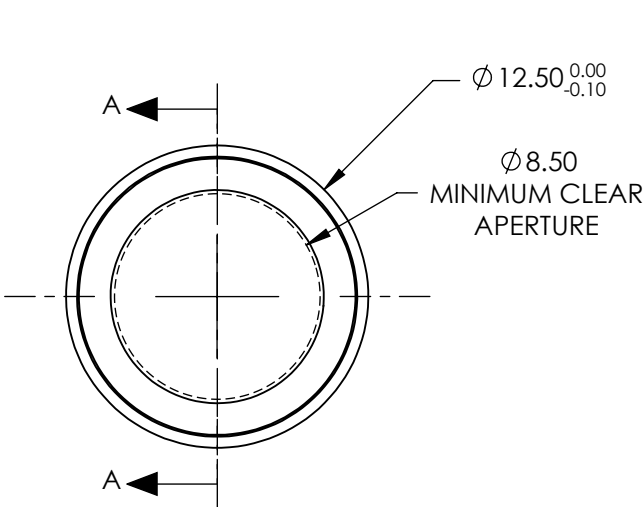

SECTION A-A

SPECIFICATION	VALUE
CENTER WAVELENGTH (CWL)	325nm ±5 nm
FULL WIDTH HALF MAX (FWHM)	50nm ±5 nm
MINIMUM TRANSMISSION	>80%
BLOCKING	≥4.0 FROM 200 - 1200 nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	Hard Coated

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO<sup>®</sup> Edmund Optics<sup>®</sup>**



ALL DIMS IN mm

TITLE

325nm CWL, 12.5mm Dia. Hard Coated OD 4  
50nm Bandpass Filter

DWG NO

12089

SHEET  
1 OF 1