
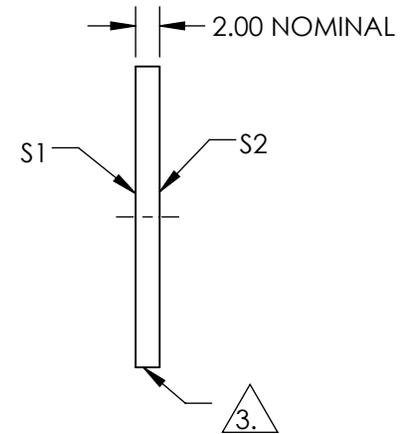
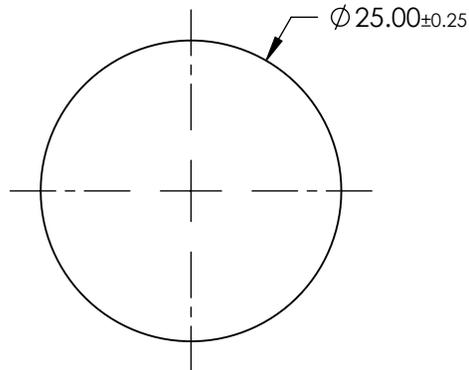


NOTES:

1. SUBSTRATE:  
BOROFLOAT®
2. COATING PERFORMANCE (APPLY ACROSS COATING APERTURE)  
T(AVG) >80% @ 400 - 550nm  
T(AVG) <1.0% @ 640 - 740nm

3. FINE GROUND SURFACE

4. ROHS COMPLIANT



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80-50	80-50
CLEAR APERTURE	≥85%	≥85%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED



ALL DIMS IN mm

**EO**® Edmund Optics®

TITLE

25mm Diameter, Cyan Dichroic Filter


DWG NO

52537

SHEET  
1 OF 1



NOTES:

1. SUBSTRATE:  
BOROFLOAT®
2. COATING PERFORMANCE (APPLY ACROSS COATING APERTURE)  
T(AVG) <1.0% @ 535 - 565nm  
T(AVG) >80% @ 640 - 740nm



3. FINE GROUND SURFACE

4. ROHS COMPLIANT

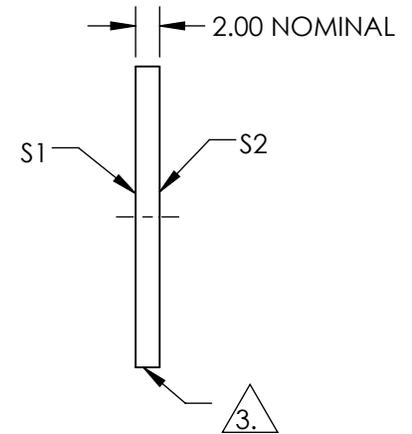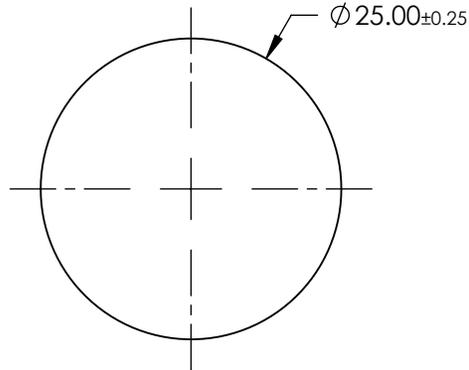

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80-50	80-50
CLEAR APERTURE	≥85%	≥85%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED



ALL DIMS IN mm

**EO**® Edmund Optics®

TITLE

25mm Diameter, Magenta Dichroic Filter




DWG NO

52540

SHEET  
1 OF 1

NOTES:


1. SUBSTRATE:  
BOROFLOAT®
2. COATING PERFORMANCE (APPLY ACROSS COATING APERTURE)  
T(AVG) <1.0% @ 400 - 475nm  
T(AVG) >80% @ 550 - 750nm
3. FINE GROUND SURFACE
4. ROHS COMPLIANT

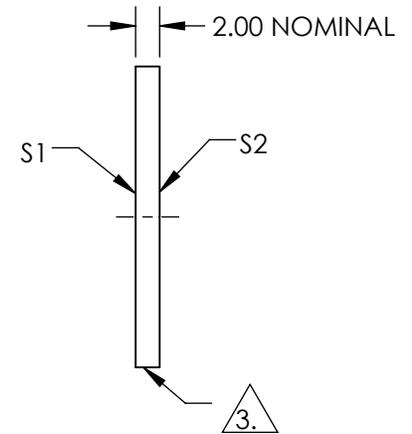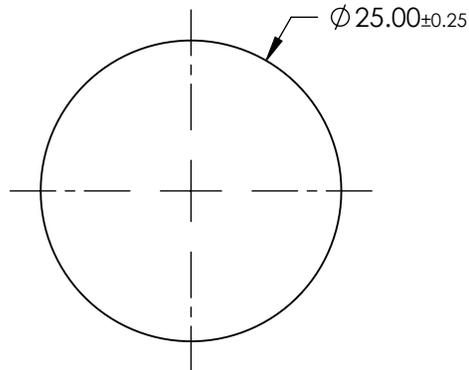

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80-50	80-50
CLEAR APERTURE	≥85%	≥85%
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

**EO**® **Edmund Optics**®

TITLE: 25mm Diameter, Yellow Dichroic Filter

DWG NO: 52543

SHEET 1 OF 1