

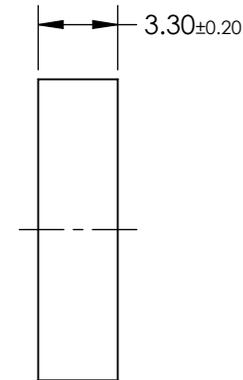
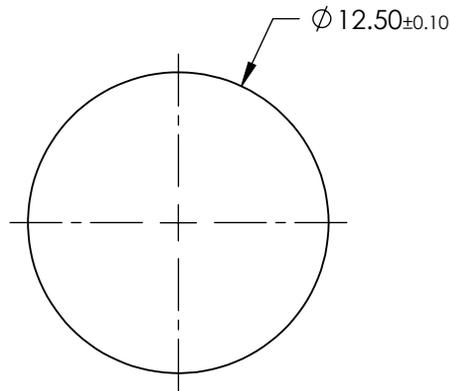


**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**




BANDPASS FILTER

	VALUE
CENTER WAVELENGTH (CWL)	550 ± 3nm
FULL WIDTH HALF MAX (FWHM)	25 ± 3nm
MINIMUM TRANSMISSION	≥90%
BLOCKING	200 - 1200nm
CLEAR APERTURE (mm)	Ø11.25
SURFACE QUALITY	80-50
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A, SECTION 3.4.1
ENVIRONMENTAL	MIL-STD-810F, SECTION 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY



THIRD ANGLE PROJECTION 

ALL DIMS IN mm

TITLE	550nm CWL, 12.5mm DIA., HARD COATED OD 4.0 25nm UNMOUNTED BANDPASS FILTER
DWG NO	15148
	SHEET 1 OF 1