



NOTES:

- 1. SUBSTRATE:
Fused Silica
- 2. COATING (APPLY ACROSS COATING APERTURE):
S1 & S2: R(ABS) ≤0.25% @ 880nm
R(AVG) ≤1.25% @ 400 - 870nm
R(AVG) ≤1.25% @ 890 - 1000nm
- 3. EFFECTIVE FOCAL LENGTH: 4.8mm
- 4. DIVERGENCE ANGLE: ±2.0 °
- 5. WAVELENGTH RANGE (nm): 400 - 1000
- 6. ROHS: COMPLIANT




DETAIL A

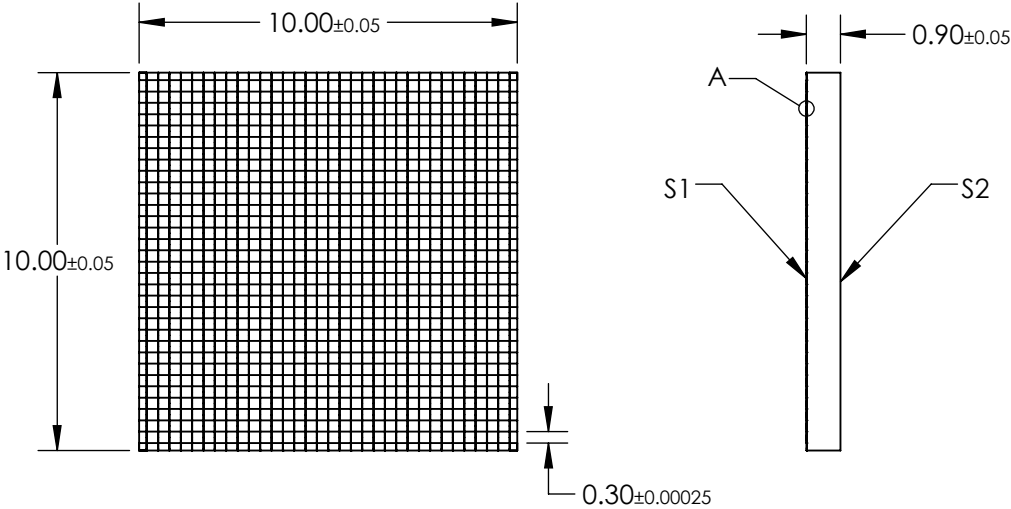

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

<div><div>EO[®]</div><div>Edmund Optics[®]</div></div>			
THIRD ANGLE PROJECTION 		TITLE	MicroLens Array 10 x 10mm, 300µm Pitch, 2° Divergence, VIS-NIR Coated
ALL DIMS IN	mm	DWG NO	15809
			SHEET 1 OF 1