


NOTES:



- 1. SUBSTRATE:
VACUUM UV GRADE CaF2
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO <1arcmin
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: R(ABS) ≤ 0.25% AT 880nm @ 0° AOI
R(AVG) ≤ 1.25% FROM 400-870nm @ 0° AOI
R(AVG) ≤ 1.25% FROM 890-1000nm @ 0° AOI

4. FINE GRIND SURFACE

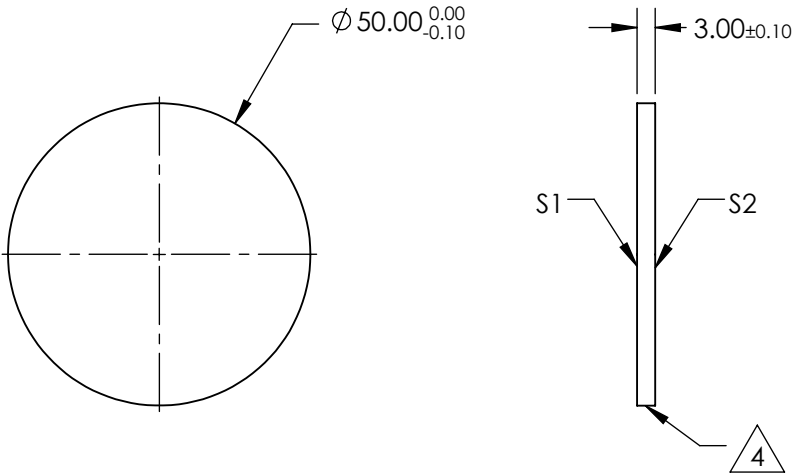

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	<div>THIRD ANGLE PROJECTION</div> 		 Edmund Optics®		
SHAPE	PLANO	PLANO			TITLE	Ø50mm, VIS - NIR, CALCIUM FLUORIDE WINDOW	
SURFACE QUALITY	40-20	40-20					
CLEAR APERTURE	Ø45.00	Ø45.00					
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	14821	SHEET 1 OF 1