
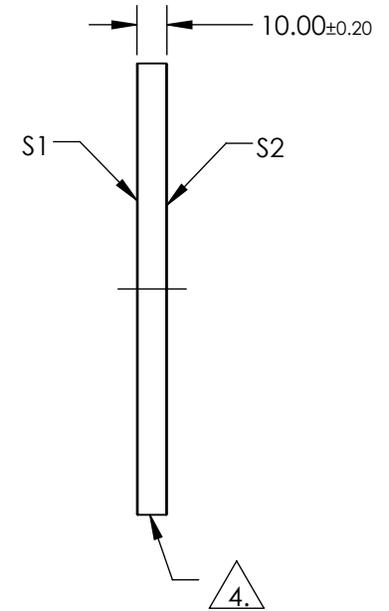
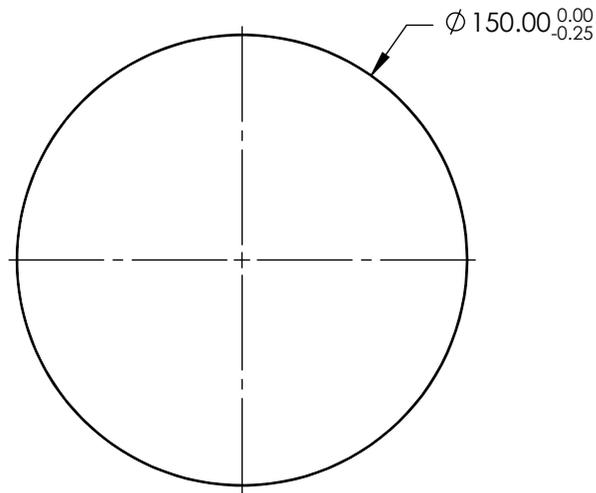


NOTES:

1. SUBSTRATE:  
N-BK7
2. S2 TO BE PARALLEL TO S1 TO WITHIN <1 ARCMIN
3. COATING (APPLY ACROSS COATING APERTURE)  
S1 & S2: NIR I (600-1050nm)  
R(AVG) ≤0.5% @ 600 - 1050nm

△ 4. FINE GRIND SURFACE

5. ROHS COMPLIANT




**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
WAVELENGTH RANGE	600 - 1050 nm	600 - 1050 nm
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

TITLE	150mm DIA., 10mm THICK, NIR I COATED λ/4 N-BK7 WINDOW	
DWG NO	17297	SHEET 1 OF 1