
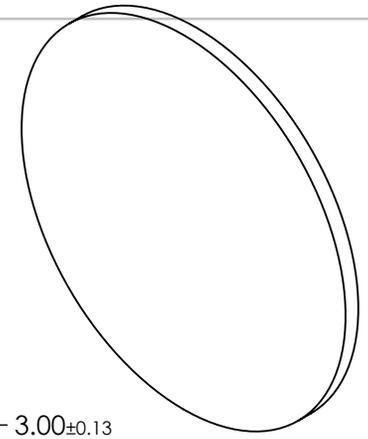
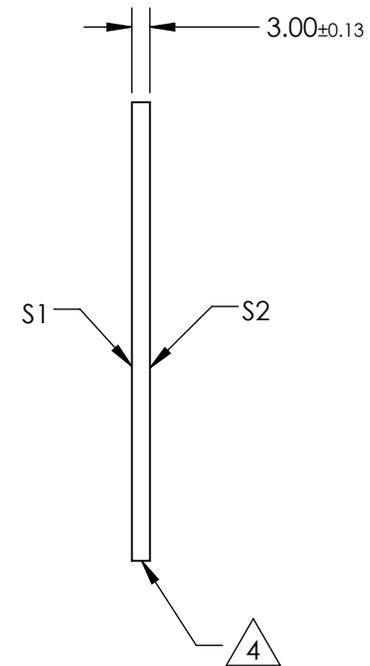


NOTES:

1. SUBSTRATE:  
Silicon (Si)
2. SURFACE S2 TO BE PARALLEL WITH S1 TO <3 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: R(AVG) <0.5% @ 3 - 5µm  
R(ABS) <1.5% @ 3 - 5µm

4. FINE GRIND SURFACE


5. RoHS COMPLIANT

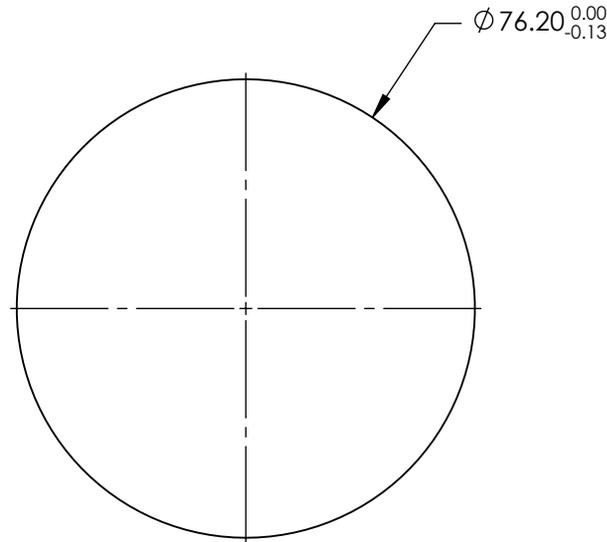

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
CLEAR APERTURE	85%	85%
SURFACE QUALITY	60-40	60-40
SURFACE FLATNESS	2λ	2λ
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE: 76.2mm Dia. x 3.0mm Thickness 3-5µm HDAR/BBAR Coated Silicon Window

DWG NO: 19720

SHEET 1 OF 1