NOTES:


1. SUBSTRATE:


H-ZK2

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1: NONE S2: NONE

3. CENTERING: ≤30 ARCMIN

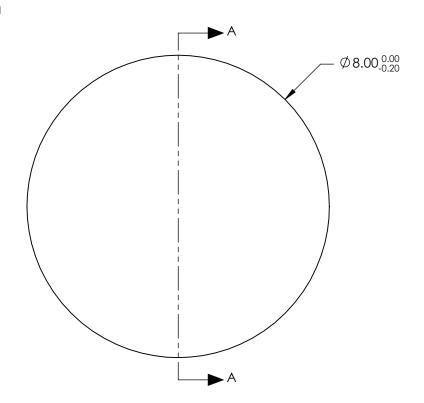

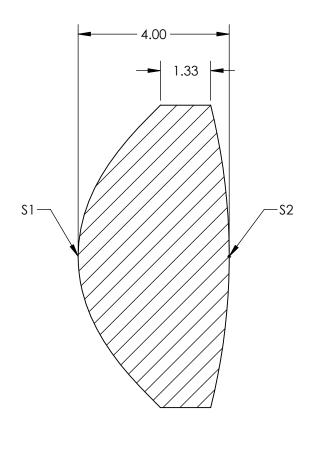

SECTION A-A

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

I AKTO TO THIS BRAWING			587.6nm	5.6		Edmund Optic	C®
	\$1	\$2	BFL @ 587.6nm	3.3			,S'
SHAPE	CONVEX	CONVEX	THIRD ANGLE PROJECTION		TITLE	8mm Dia. x 5.6mm FL, Aspheric Condenser Lens	
SURFACE QUALITY	80-50 (typical)	80-50 (typical)					
CLEAR APERTURE	Ø7.20	Ø7.20					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	19510	SHEET 1 OF 1