NOTES:

1. SUBSTRATE: POLYMER FILM XP42-100

2. OPERATING TEMPERATURE (°C): -10 to +60

3. OPERATING HUMIDITY (%): ≤80 (No Condensation)

4. WAVELENGTH RANGE: 400-700nm

5. POLARIZATION: >99.98

6. TRANSMISSION (%):
   SINGLE 42 ±2
   PARALLEL: 36.4
   CROSSED: <0.004

7. ROHS COMPLIANT

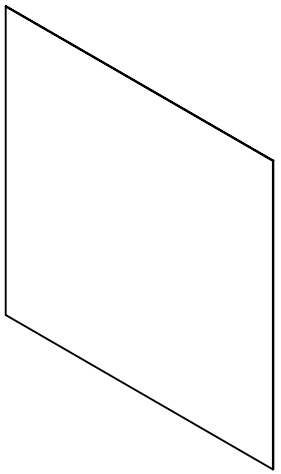

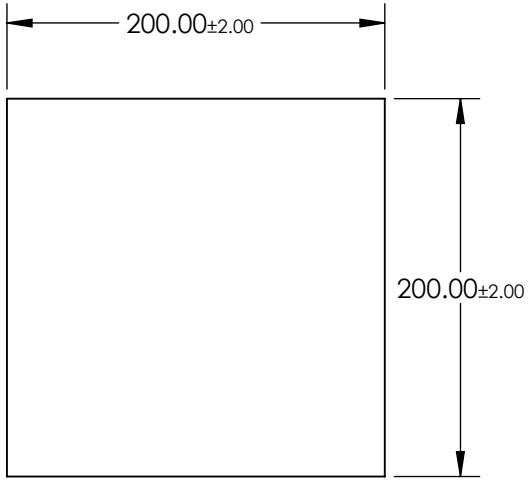

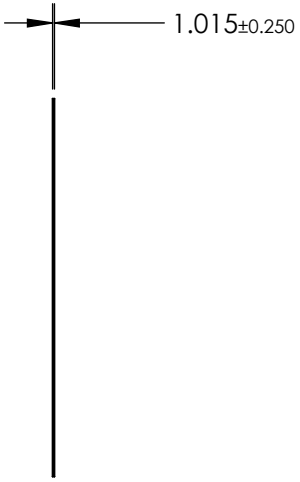

FOR INFORMATION ONLY:
DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®

THIRD ANGLE PROJECTION		TITLE	200 x 200mm Dia. Linear Polarizer (XP42-100)	
ALL DIMS IN	mm	DWG NO	19957	SHEET 1 OF 1