

NOTES:


- 1. SUBSTRATE: Fused Silica (Corning 7980)
- 2. S2 TO BE PARALLEL WITH S1 TO WITHIN <1 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) S1 & S2: R(AVG) ≤0.4% FROM 425 - 675nm

4. FINE GRIND SURFACE

5. Rohs Compliant



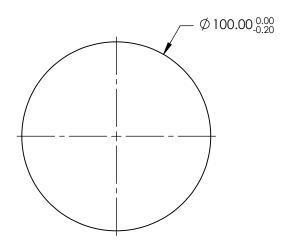

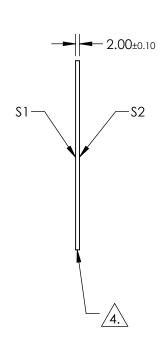

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

| | \$1 | \$2 | | | |
|---------------------|----------------------|----------------------|--|--|--|
| SHAPE | PLANO | PLANO | | | |
| SURFACE QUALITY | 40-20 | 40-20 | | | |
| CLEAR APERTURE (mm) | Ø90.00 | Ø90.00 | | | |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | | | |

| | | | Edmund Optics® | | |
|---|---------------|--------------------|-----------------------|---|---------------|
| | THIRD ANGLE - | $\Rightarrow \Box$ | TITLE | 100mm Dia., 2mm Thick, VIS 0° Coated Fused Silica Window | d, λ/4 |
|) | ALL DIMS IN | mm | DWG NO | 22058 | SHEET 1 OF |