

NOTES:

1. SUBSTRATE MATERIAL: Fused Silica
2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 arcsec
3. COATING (APPLY ACROSS CLEAR APERTURE)



S1: SILVER WITH MULTILAYER OVERCOAT

R(avg) > 99% @ 600 - 1000nm @ 0° AOI, Rs > 99% @ 540 - 1000nm @ 45° AOI, Rp > 98.5% @ 730 - 870nm @ 45° AOI

S2: NONE

4. FINE GRIND SURFACE

5. ROHS COMPLIANT

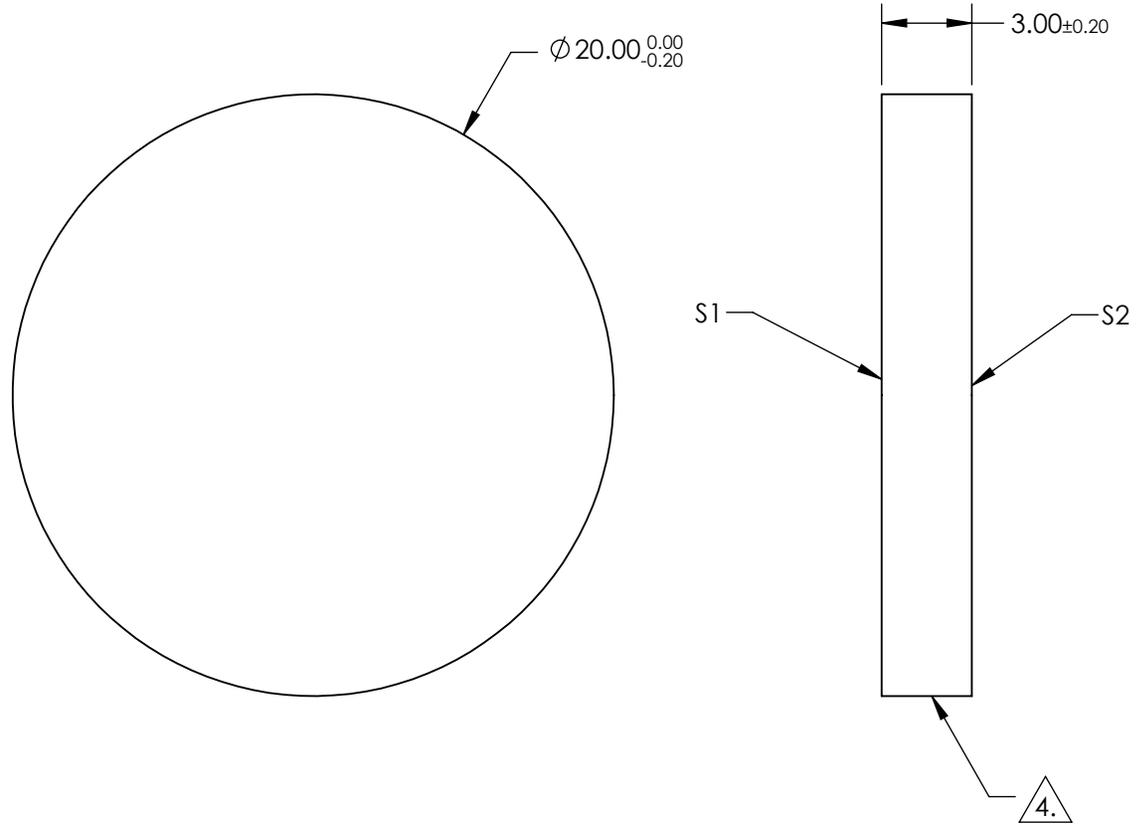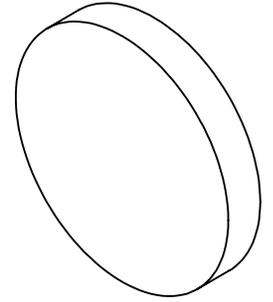


**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

	S1	S2
SURFACE QUALITY	20 - 10	COMMERCIAL POLISH
SURFACE FLATNESS	$\lambda/10$	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

TITLE	MIRROR 1/10 WAVE UF SILVER 600-1050NM 20mm DIA
DWG NO	21984
SHEET 9 OF 20	