


- NOTES:
- 1. SUBSTRATE:
FUSED SILICA
 - 2. RoHS: COMPLIANT
 - 3. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN < 5 ARCMIN
 - 4. COATING (APPLY ACROSS CLEAR APERTURE)
- S1 & S2: UV-VIS (250-700nm)
Rabs ≤1.0% @ 350 - 450nm Ravg ≤1.5% @ 250 - 700nm



5. FINE GRIND SURFACE

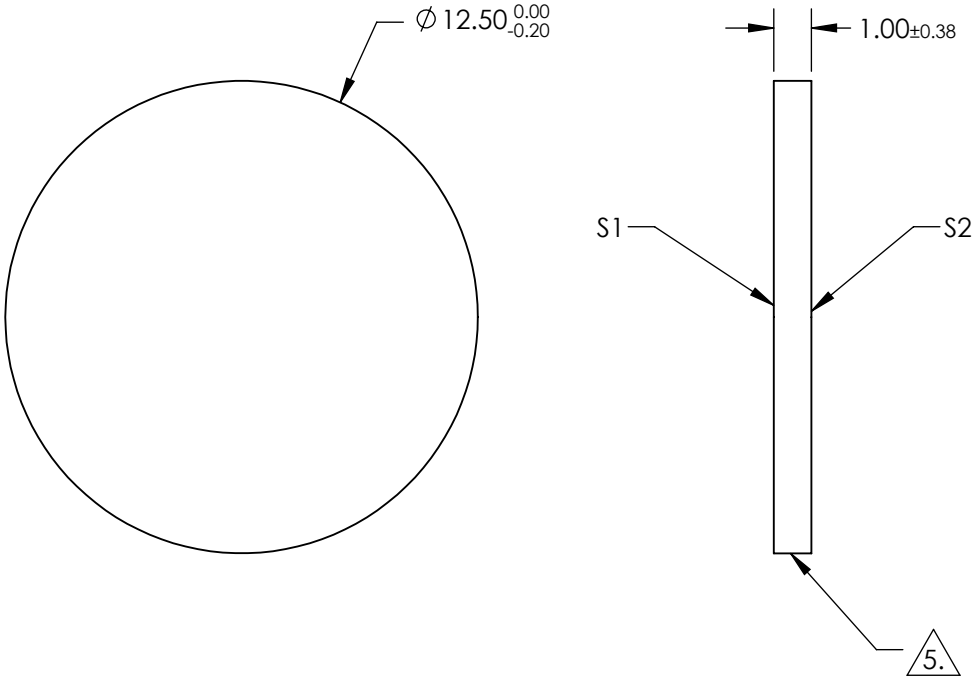

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE ACCURACY	1λ	1λ
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	Ø 11.25	Ø 11.25
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

 Edmund Optics®			
THIRD ANGLE PROJECTION 		TITLE	12.5mm Dia. 1mm Thick UV-VIS Coated, 1λ Fused Silica Window
ALL DIMS IN	mm	DWG NO	23303
			SHEET 3 OF 35