


- NOTES:
- 1. SUBSTRATE: N-BK7
  - 2. S2 TO BE PARALLEL WITH S1 TO <1 ARCMIN
  - 3. COATING (APPLY ACROSS CLEAR APERTURE)

S1: NIR I (600-1050nm)  
S2: NIR I (600-1050nm)  
Ravg ≤0.5% @ 600 - 1050nm

4. FINE GRIND SURFACE

- 5. ROHS COMPLIANT
- 6. TRANSMITTED WAVEFRONT (P-V):  
λ/4 (per inch over clear aperture)

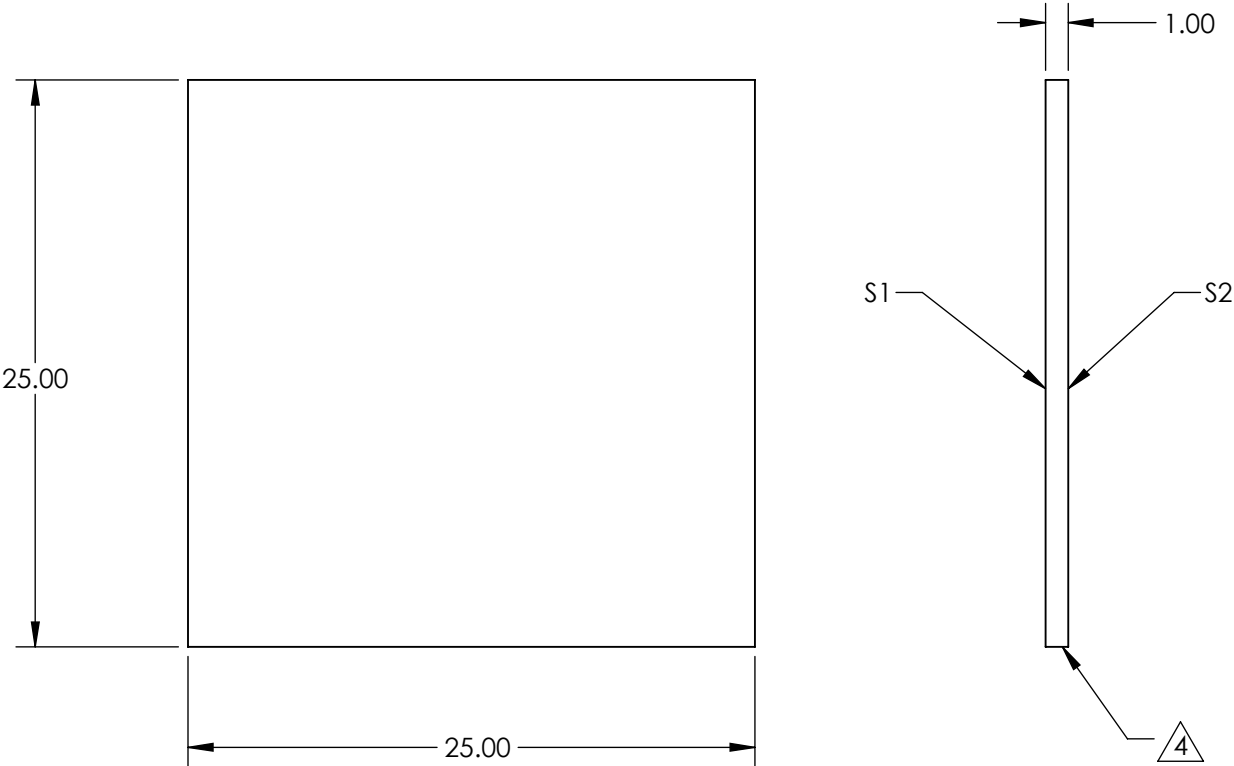

**FOR INFORMATION ONLY:**  
**DO NOT MANUFACTURE**  
**PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2			Edmund Optics		
SHAPE	PLANO	PLANO	THIRD ANGLE PROJECTION		TITLE	25mm Sq., 1mm Thick, NIR I Coated λ/4 N-BK7 Window	
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	22.50 x 22.50	22.50 x 22.50					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	23436	SHEET 26 OF 48