
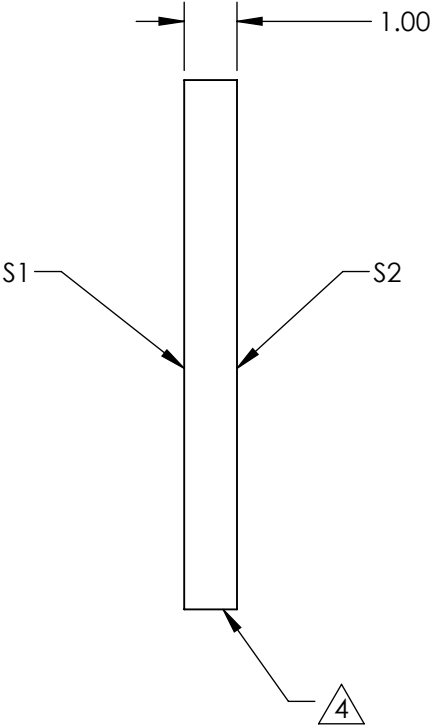


- NOTES:
- 1. SUBSTRATE: N-BK7
  - 2. S2 TO BE PARALLEL WITH S1 TO <1 ARCMIN
  - 3. COATING (APPLY ACROSS CLEAR APERTURE)
    - S1: VIS-EXT (350-700nm)
    - S2: VIS-EXT (350-700nm)
    - Ravg <0.5% @ 350 - 700nm

4. FINE GRIND SURFACE

- 5. ROHS COMPLIANT
- 6. TRANSMITTED WAVEFRONT (P-V):  
 $\lambda/4$  (per inch over clear aperture)

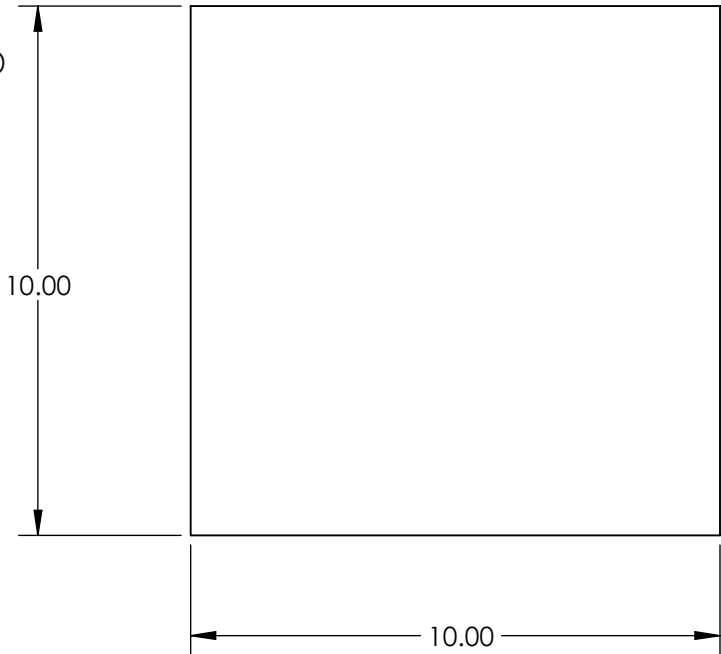

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	9.00 x 9.00	9.00 x 9.00
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE  
PROJECTION

ALL DIMS IN mm

Edmund Optics®

TITLE	10mm Sq., 1mm Thick, VIS-EXT Coated $\lambda/4$ N-BK7 Window		
DWG NO	23457	SHEET 33 OF 48	