


## NOTES:


1. COATING (APPLY ACROSS CLEAR APERTURE) LASER V-COAT R(abs) 0.25% @ 1064 nm

## 2. RoHS COMPLIANT

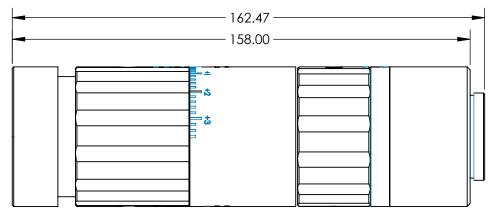

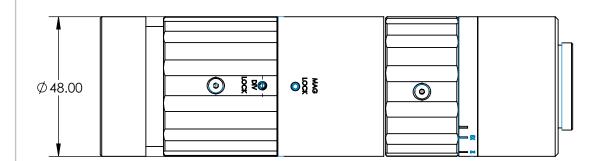

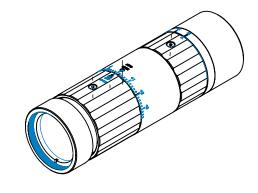



## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

DAMAGE THRESHOLD (PULSED)	10 J/cm2 (>3X), 5 J/cm2 (2-3X)@1064nm,10ns,20Hz				Edmund C	Optics®
DESIGN WAVELENGTH DWL (nm)	1064		<del>)</del> -		1064nm 2X – 8X Gemma® V	ariable Beam
TRANSMISSION	>97.5 @ DWL	THIRD ANGLE PROJECTION		TITLE	Expander	
TRANSMITTED WAVEFRONT, P-V	<λ/10 for Input Beam 3.5mm (2X-6X) <λ/10 for Input Beam 2.5mm (>6X)		'		'	
		ALL DIMS IN	mm	DWG NO	15544	SHEET 1 OF 1