
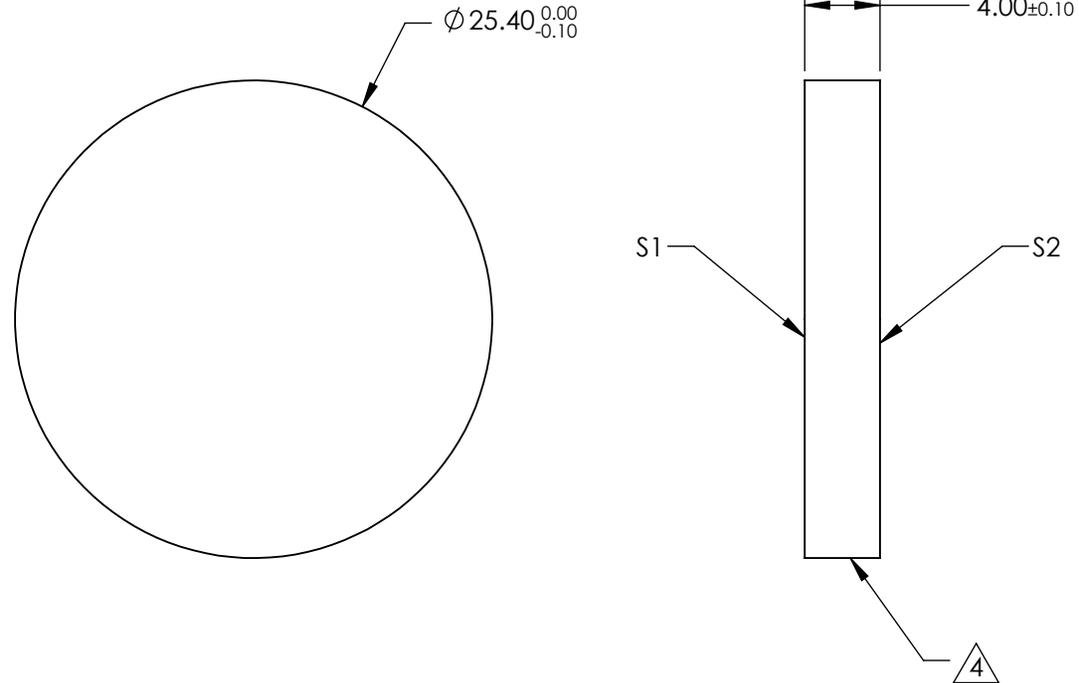


NOTES:

1. SUBSTRATE:
Calcium Fluoride (CaF₂)
2. SURFACE S2 TO BE PARALLEL WITH S1 TO <1
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: BBAR (2000-5000nm)
4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	$\phi 21.59$	$\phi 21.59$
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



ALL DIMS IN

mm

EO® **Edmund Optics**®

25.4mm Dia., 4mm Thick, 30° Wedge, BBAR
(2000-5000nm) Coated, Calcium Fluoride
(CaF₂) Wedged Window

TITLE

DWG NO

23849

SHEET
2 OF 28