
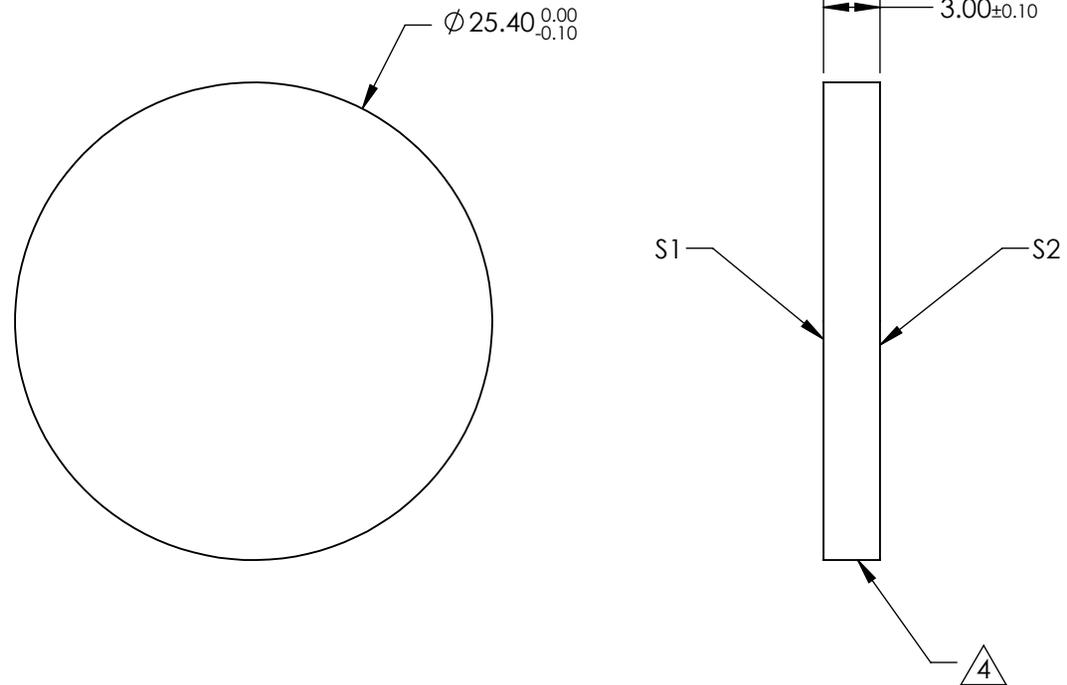


NOTES:

1. SUBSTRATE:  
Calcium Fluoride (CaF<sub>2</sub>)
2. SURFACE S2 TO BE PARALLEL WITH S1 TO <1
3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: BBAR (2000-5000nm)
4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	$\phi 21.59$	$\phi 21.59$
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION

ALL DIMS IN mm

**Edmund Optics®**

25.4mm Dia., 4mm Thick, 3° BBAR (2000-5000nm) Coated, Calcium Fluoride (CaF<sub>2</sub>)  
Wedged Window

TITLE

DWG NO

23850

SHEET  
1 OF 28