
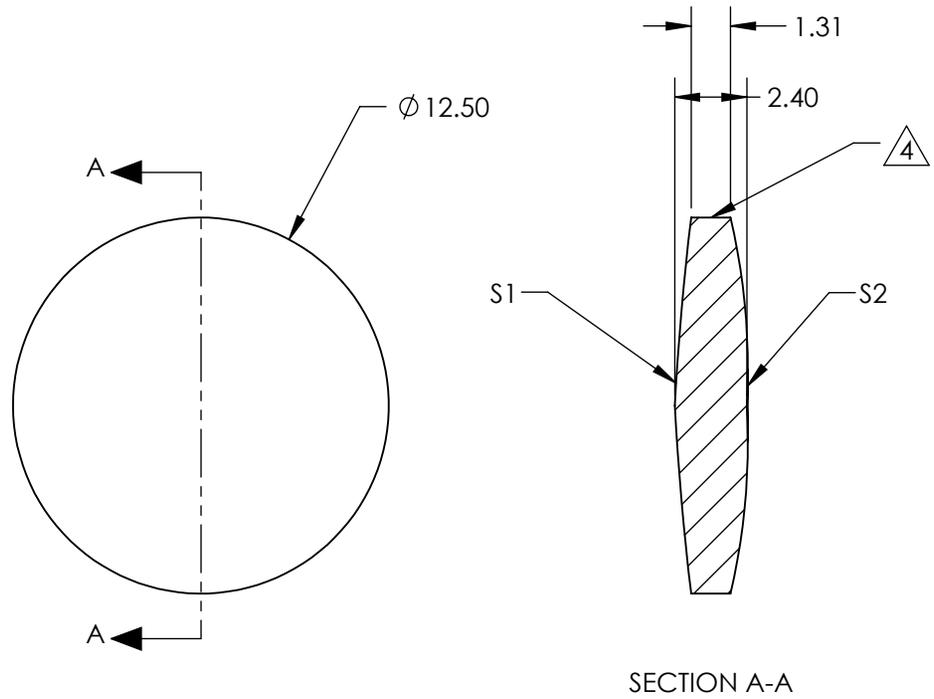


NOTES:

1. SUBSTRATE:
Fused Silica (or equivalent)
2. CENTERING TOLERANCE (AT 587.6nm): <1 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)

S1&S2: NONE
4. FINE GRIND SURFACE (ADD INK NOTE AS NEEDED)
5. FOCAL LENGTH (EFL): 40mm
BACK FOCAL LENGTH (BFL): 38.65mm
6. ROHS COMPLIANT
7. PROTECTIVE BEVEL AS NEEDED
8. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
9. DESIGN WAVELENGTH: 587.6nm



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
RADIUS	98.15	22.38
SURFACE QUALITY	10-5	10-5
CLEAR APERTURE	Ø 11.25	Ø 11.25
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



ALL DIMS IN mm

EO® Edmund Optics®

TITLE

LENS DCX BF 12.5 X 40 UNCTD TS

DWG NO

22565

SHEET
3 OF 8