## NOTES:

1. SUBSTRATE:


**FUSED SILICA** 

- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 ARCSEC
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

\$1:Ravg >96% @ 700 - 2000nm Ravg >96% @ 2000 - 10,000nm \$2:NONE



5. ROHS COMPLIANT

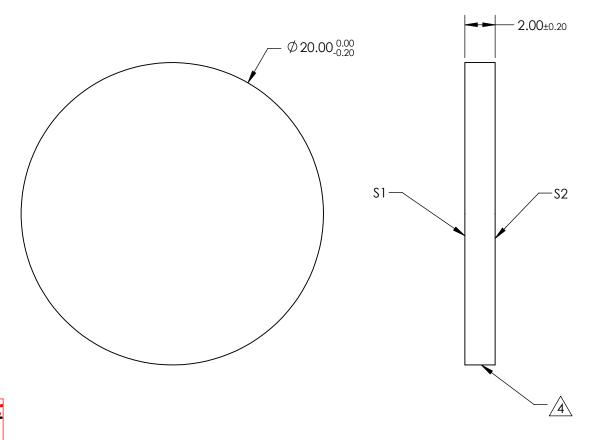

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SURFACE QUALITY	20-10	COMMERCIAL POLISH	
SURFACE FLATNESS	λ/10 (Measured Pre-Coating)	N/A	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	

**Edmund Optics®** 

Н	THIRD ANGLE PROJECTION		TITLE	20mm Diameter, 2mm Thick, Diameter Protected Gold Coated, λ/10 Mirror	
ED	ALL DIMS IN	mm	DWG NO	26373	SHEET 19 OF 28