


NOTES:


1. SUBSTRATE:
FUSED SILICA
2. SURFACE S2 TO BE PARALLEL TO S1 TO WITHIN <3 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1: R(abs): >99% @ 355nm
T(abs): >95% @ 532nm

S2: R(abs): <0.5% @ 532nm
- DAMAGE THRESHOLD,PULSED:
S1: 2.5 J/cm² @ 355nm, 20ns, 20Hz
5 J/cm² @ 532nm, 20ns, 20Hz

S2: 10 J/cm² @ 532nm, 20ns, 20Hz



4. FINE GRIND SURFACE
5. ROHS COMPLIANT

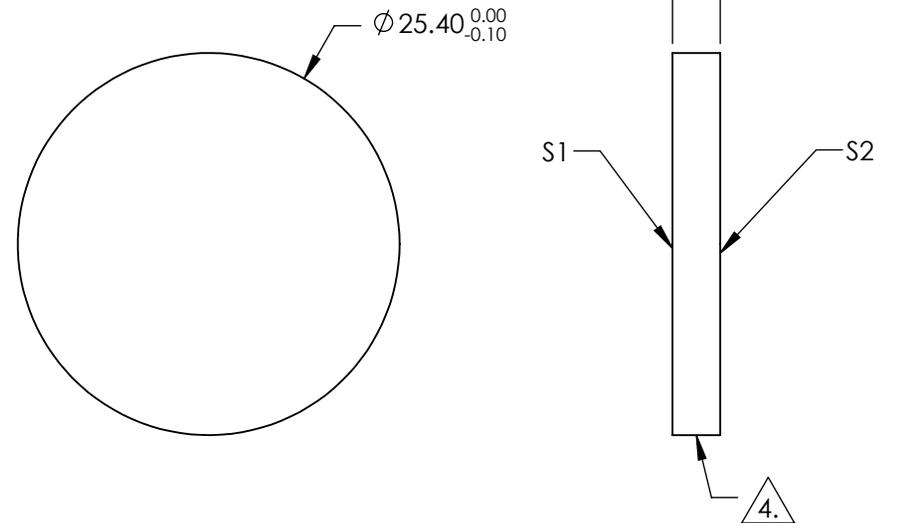

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	10 - 5	COMMERCIAL POLISH
CLEAR APERTURE	$\varnothing 22.86$	N/A
SURFACE FLATNESS	$\lambda/10$	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



ALL DIMS IN

mm

EO® Edmund Optics®

TITLE

25.4mm Dia., 532nm T, 355nm R 45° Thin
Harmonic Separator

DWG NO

29043

SHEET
62 OF 86