

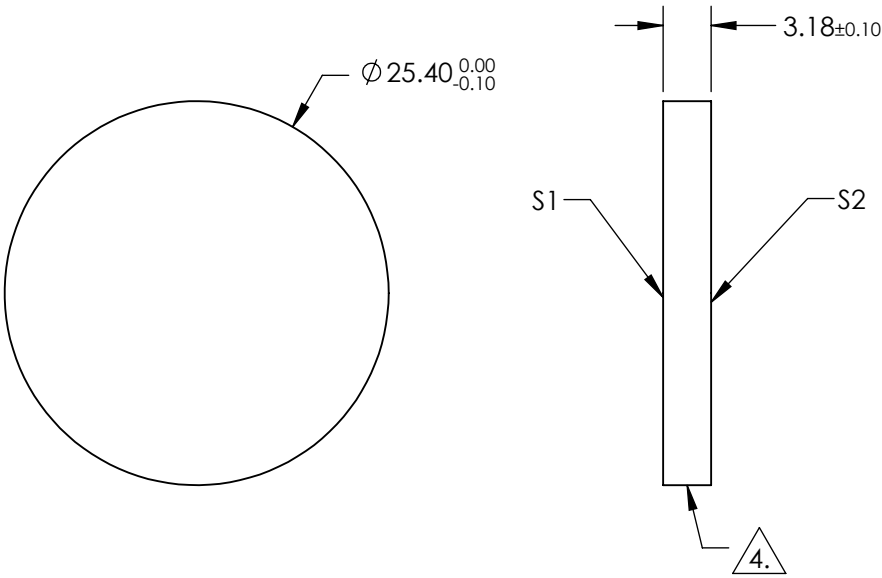

NOTES:

1. SUBSTRATE:
FUSED SILICA
2. SURFACE S2 TO BE PARALLEL TO S1 TO WITHIN <3 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1: R(abs): >99% @ 532nm
T(abs): >95% @ 355nm

S2: R(abs): <0.5% @ 355nm
- DAMAGE THRESHOLD, PULSED:
S1: 5 J/cm² @ 532nm, 20ns, 20Hz
2.5 J/cm² @ 355nm, 20ns, 20Hz



S2: 7.5 J/cm² @ 355nm, 20ns, 20Hz

4. FINE GRIND SURFACE
5. ROHS COMPLIANT



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2			 Edmund Optics®		
SHAPE	PLANO	PLANO					
SURFACE QUALITY	10 - 5	COMMERCIAL POLISH	TITLE				
CLEAR APERTURE	Ø22.86	N/A				25.4mm Dia., 355nm T, 532nm R 45° Thin Harmonic Separator	
SURFACE FLATNESS	λ/10	N/A	ALL DIMS IN				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				mm	
			DWG NO				
			29047				
			SHEET 66 OF 86				