NOTES:


1. SUBSTRATE:


FUSED SILICA CORNING 7980

- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1&\$2: VIS-EXT (350-700nm) Ravg ≤0.5% @ 350 - 700nm @ 0° AOI



5. ROHS COMPLIANT



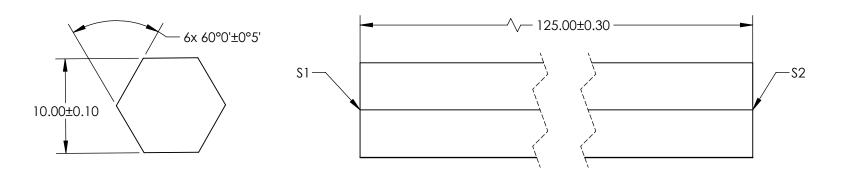

PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY					Edmund Optics®			
	\$1	\$2				10mm Aperture x 125mm L, \	/IS-EXT Coated.	
SHAPE	PLANO	PLANO	THIRD ANGLE PROJECTION	TITLE	Standard NA, Fused Silica Light Pipe			
SURFACE FLATNESS	3λ	3λ		1		0.00		
SURFACE QUALITY	60 - 40	60 - 40	ALL DIMS IN	mm	DWG NO	70733	SHEET 20 OF	